TAVAKOL ELECTRONIC
توکل الکترونیک
مرجع تخصصی تأمین قطعات الکترونیکی اورجینال
این دیتاشیت توسط توکل الکترونیک تهیه و ارائه شده است.
جهت مشاهده قیمت، موجودی و ثبت سفارش این قطعه به وب‌سایت توکل الکترونیک مراجعه فرمایید.
مشاهده قیمت و خرید
برای خرید و مشاهده سایر محصولات کلیک کنید

Fuji Electric

Innovating Energy Technology

2MBI600VX-120-50

IGBT Modules

Power Module (V series)
1200V / 600A / 2-in-1 package




■ Features

Low $V_{CE(sat)}$
Low Inductance Module structure
Solderless press-fit terminals

■ Applications


Inverter for Motor Drives, AC and DC Servo Drives
Uninterruptible Power Supply Systems, Wind Turbines, PV Power Conditioning Systems

■ Outline drawing (Unit : mm)

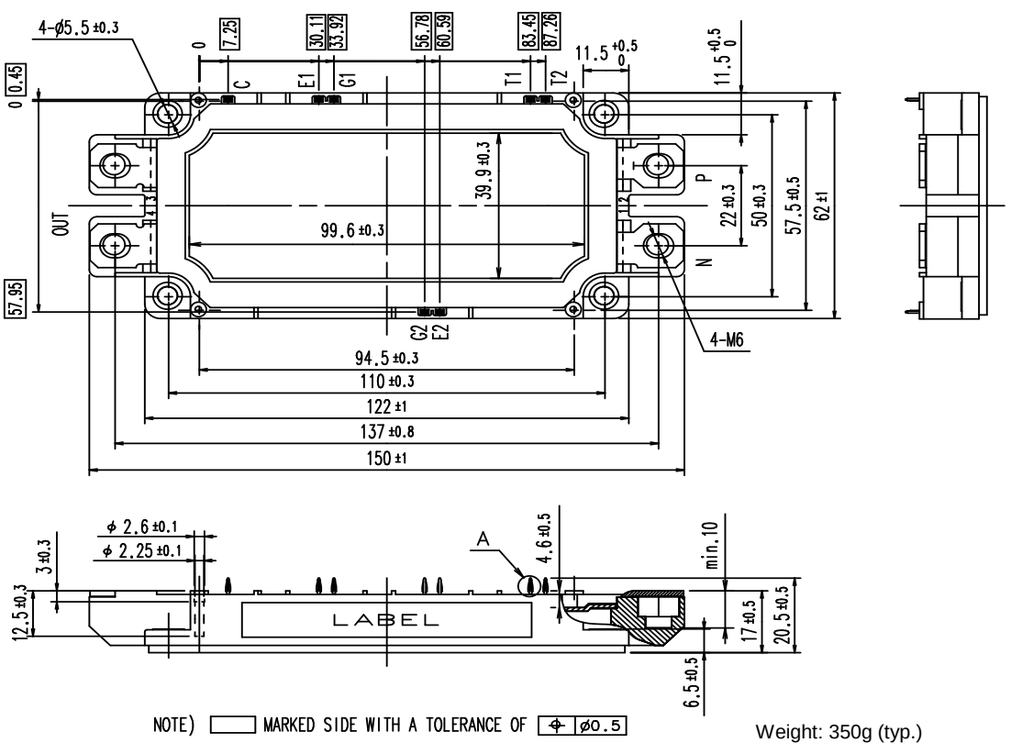

Weight: 350g (typ.)

■ Equivalent Circuit

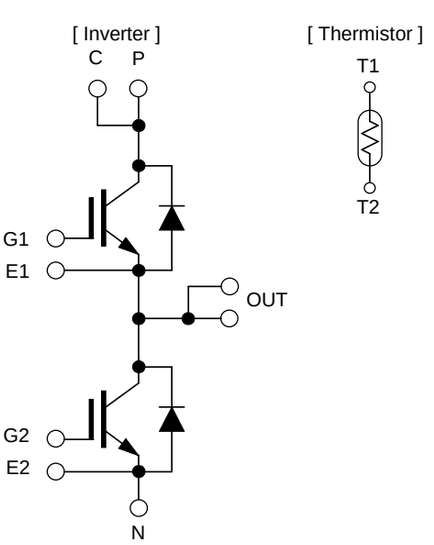

FM5F8402
2014/11

2MBI600VX-120-50

■ Absolute Maximum Ratings (at T_C= 25°C unless otherwise specified)

Items		Symbols	Conditions		Maximum Ratings	Units
Collector-Emitter voltage		V_{CES}			1200	V
Gate-Emitter voltage		V_{GES}			±20	V
Collector current		I_C	Continuous	T_C=25°C	750	A
				T_C=100°C	600	
		I_C pulse	1ms		1200	
		$-I_C$			600	
		$-I_C$ pulse	1ms		1200	
Collector power dissipation		P_C	1 device		3750	W
Junction temperature		T_j			175	°C
Operating junction temperature (under switching conditions)		T_{jop}			150	
Case temperature		T_c			125	
Storage temperature		T_{stg}			-40 ~ 125	
Isolation voltage	between terminal and copper base (*1)	V_{iso}	AC: 1min.		2500	VAC
	between thermistor and others (*2)					
Screw Torque	Mounting (*3)	-			3.5	N m
	Terminals (*4)	-			4.5	

(*1) All terminals should be connected together during the test.
(*2) Two thermistor terminals should be connected together, other terminals should be connected together and shorted to base plate during the test.
(*3) Recommendable Value : 2.5-3.5 Nm (M5)
(*4) Recommendable Value : 3.5-4.5 Nm (M6)

■ Electrical characteristics (at T_j= 25°C unless otherwise specified)

Items	Symbols	Conditions		Characteristics min.	Characteristics typ.	Characteristics max.	Units
Zero gate voltage Collector current	I_{CES}	V_{GE}=0V, V_{CE}= 1200V		-	-	3.0	mA
Gate-Emitter leakage current	I_{GES}	V_{CE}=0V, V_{GE}=±20V		-	-	600	nA
Gate-Emitter threshold voltage	$V_{GE(th)}$	V_{CE}=20V, I_C= 600mA		6.0	6.5	7.0	V
Collector-Emitter saturation voltage	$V_{CE(sat)}$ (terminal)	V_{GE} = 15V, I_C= 600A	T_j=25°C	-	2.65	3.10	V
			T_j=125°C	-	3.00	-	
			T_j=150°C	-	3.05	-	
	$V_{CE(sat)}$ (chip)		T_j=25°C	-	1.85	2.30	
			T_j=125°C	-	2.20	-	
			T_j=150°C	-	2.25	-	
Internal gate resistance	$R_{G(int)}$	-		-	1.25	-	Ω
Input capacitance	C_{ies}	V_{CE}=10V, V_{GE}=0V, f=1MHz		-	48	-	nF
Turn-on time	t_{on}	V_{CC}= 600V, V_{GE}= ±15V, L_s= 80nH, I_C= 600A, R_G= 0.62Ω		-	550	-	nsec
	t_r			-	180	-	
	$t_{r(i)}$			-	120	-	
Turn-off time	t_{off}			-	1050	-	
	t_f			-	110	-	
Forward on voltage	V_F (terminal)	V_{GE} = 0V, I_F= 600A	T_j=25°C	-	2.50	3.00	V
			T_j=125°C	-	2.65	-	
			T_j=150°C	-	2.60	-	
	V_F (chip)		T_j=25°C	-	1.70	2.15	
			T_j=125°C	-	1.85	-	
			T_j=150°C	-	1.80	-	
Reverse recovery time	t_{rr}	I_F= 600A		-	200	-	nsec
Thermistor Resistance	R	T=25°C		-	5000	-	Ω
		T=100°C		465	495	520	
Thermistor B value	B	T=25/50°C		3305	3375	3450	K


5. Thermal resistance characteristics

Items	Symbols	Conditions	Characteristics min.	Characteristics typ.	Characteristics max.	Units
Thermal resistance (1device)	$R_{th(j-c)}$	IGBT	-	-	0.04	°C/W
		FWD	-	-	0.06	
Contact thermal resistance (1device) (*1)	$R_{th(c-f)}$	with thermal compound	-	0.0167	-	


(*1) This is the value which is defined mounting on the additional cooling fin with thermal compound.

2MBI600VX-120-50


Collector current vs. Collector-Emitter voltage
T_j = 25°C / chip

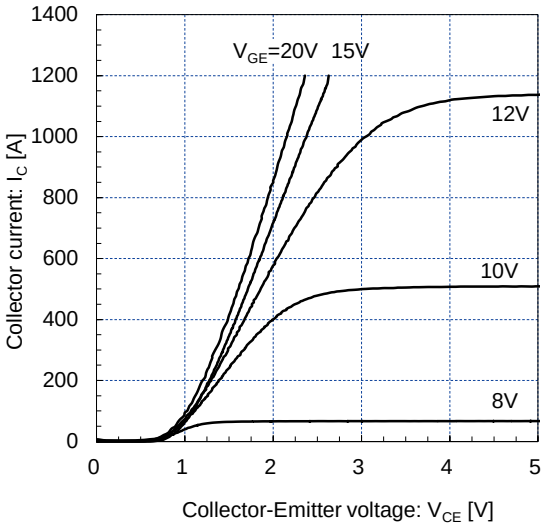


Collector current vs. Collector-Emitter voltage (typ.)
T_j = 150°C / chip

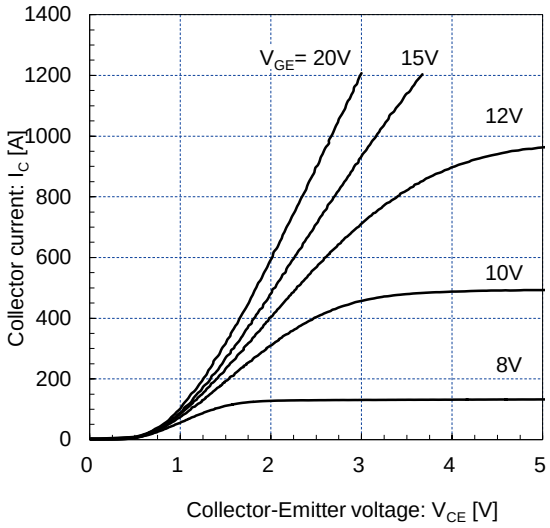


Collector current vs. Collector-Emitter voltage
V_{GE} = 15V / chip

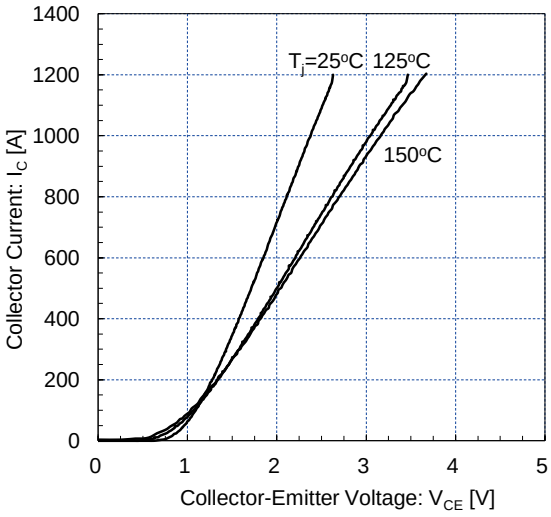


Collector-Emitter voltage vs. Gate-Emitter voltage
T_j = 25°C / chip

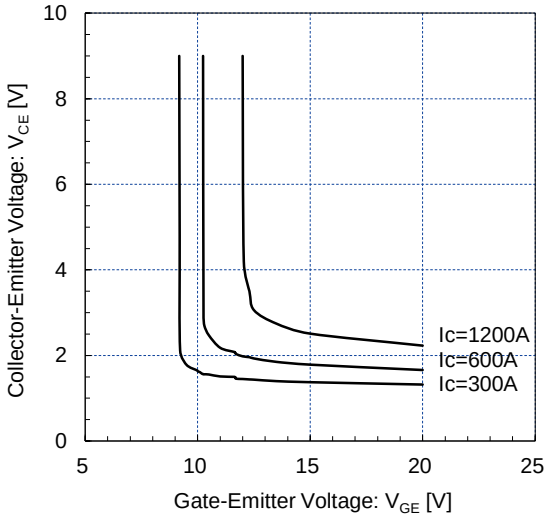

Capacitance vs. Collector-Emitter Voltage
V_{GE}= 0V, f= 1MHz, T_j= 25°C

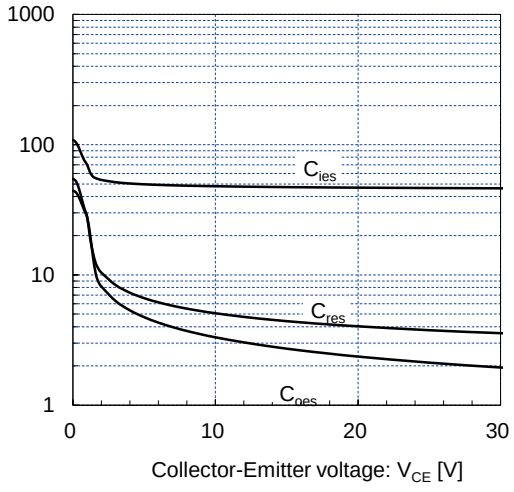


Dynamic Gate Charge (typ.)
Vcc=600V, Ic=600A, Tj= 25°C

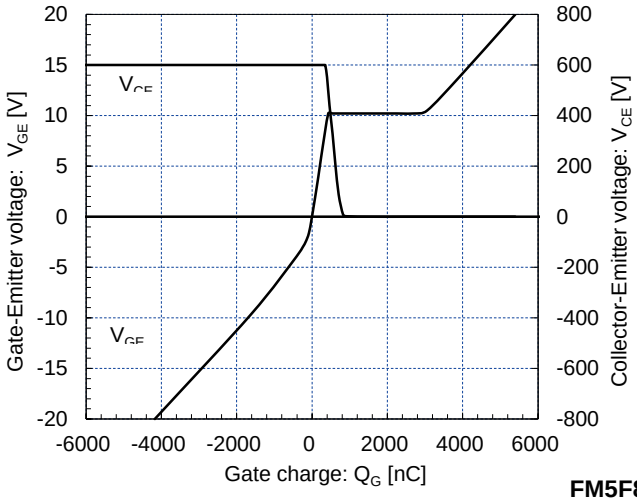


2MBI600VX-120-50


Switching time vs. Collector current (typ.)
Vcc=600V, VGE=±15V, Rg=0.62Ω, Tj=25°C

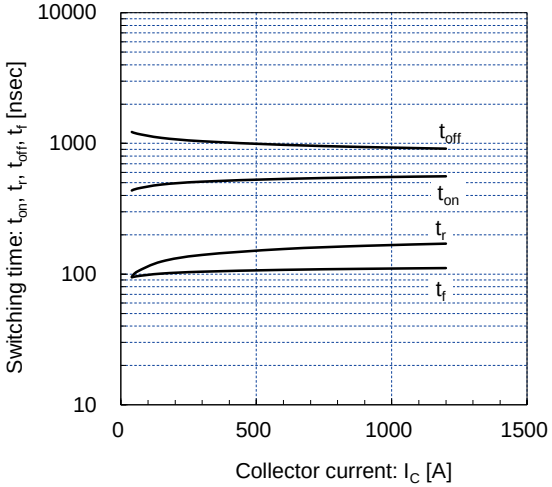


Switching time vs. Collector current (typ.)
Vcc=600V, VGE=±15V, Rg=0.62Ω, Tj=125°C, 150°C

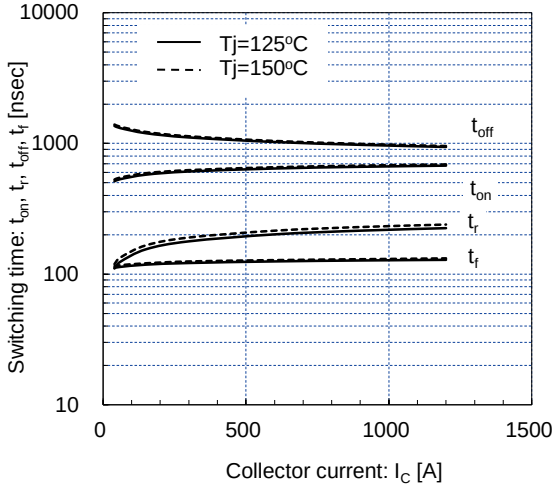


Switching time vs. Gate resistance (typ.)
/cc=600V, Ic=600A, VGE=±15V, Tj=125°C, 150°(

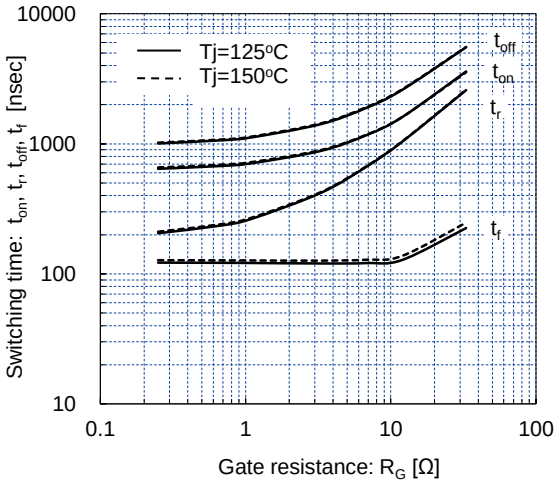


Switching loss vs. Collector current (typ.)
Vcc=600V, VGE=±15V, Rg=0.62Ω, Tj=125°C, 150°C

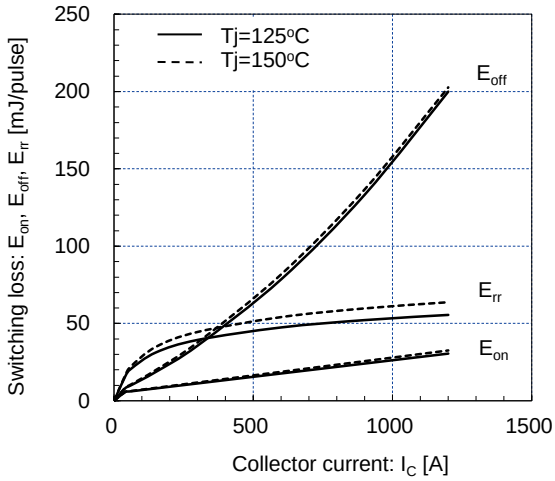

Switching loss vs. Gate resistance (typ.)
/cc=600V, Ic=600A, VGE=±15V, Tj=125°C, 150°(

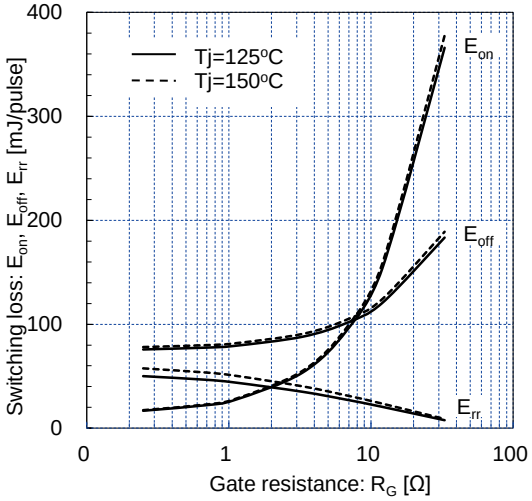


Reverse bias safe operating area (max.)
+VGE=15V, -VGE=15V, Rg=0.62Ω, Tj=150°C

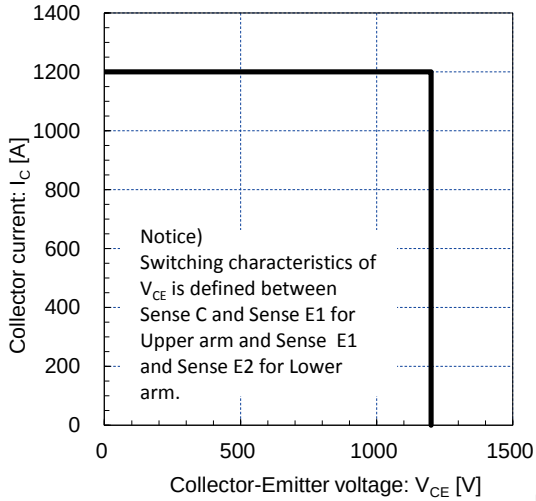


2MBI600VX-120-50


Forward current vs. Forward vltage (typ.)
chip

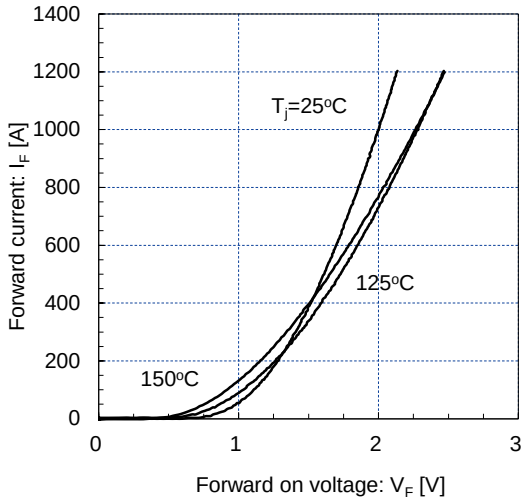


Reverse recovery characteristics (typ.)
Vcc=600V, VGE=±15V, Rg=0.62Ω, Tj=25°C

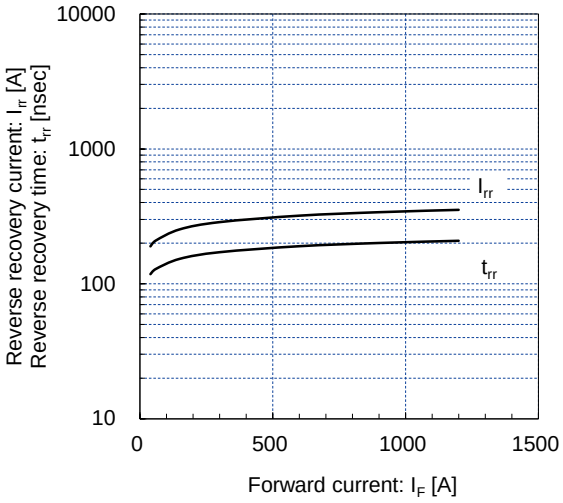

Reverse Recovery Characteristics (typ.)
Tj=125℃,150℃

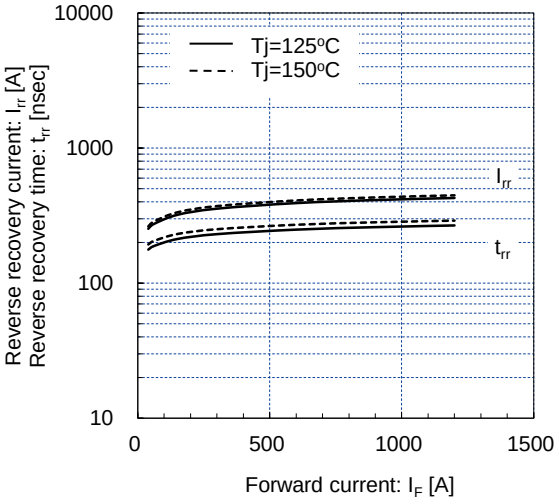


Transient Thermal Resistance (max.)

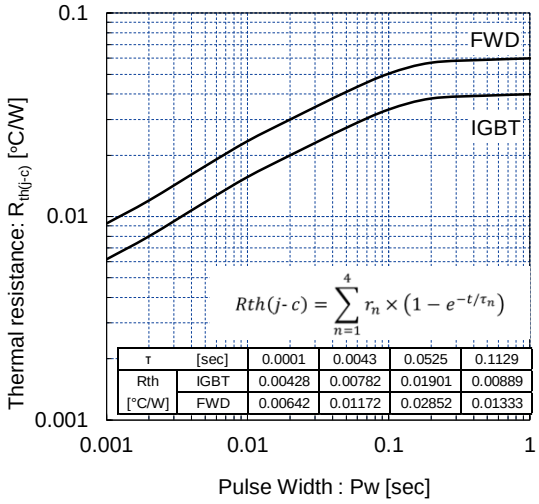


τ	[sec]	0.0001	0.0043	0.0525	0.1129
Rth	IGBT	0.00428	0.00782	0.01901	0.00889
[°C/W]	FWD	0.00642	0.01172	0.02852	0.01333

[THERMISTOR]
Temperature characteristic (typ.)

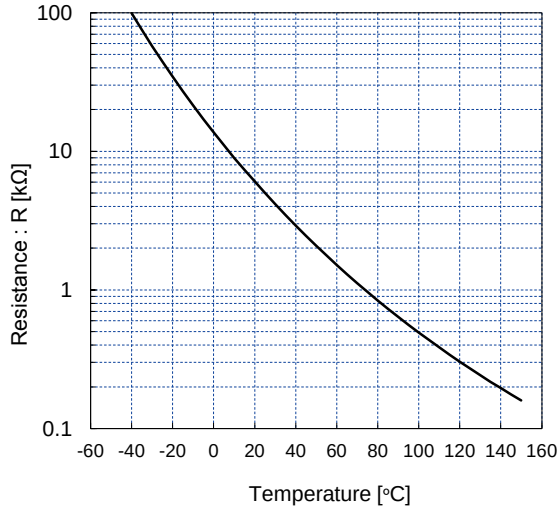

FWD safe operating area (max.)
Tj=150°C

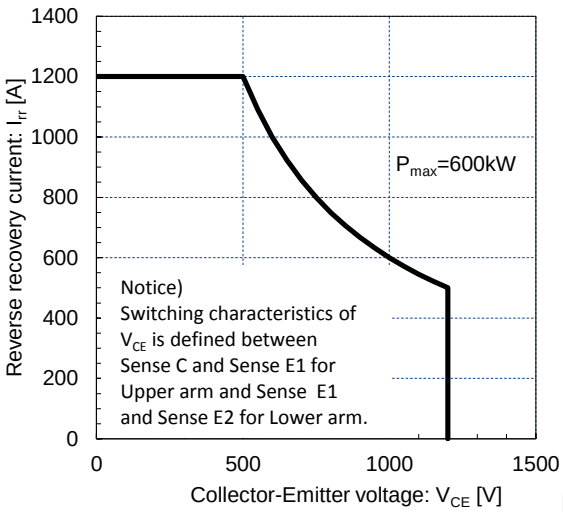

Warnings

1. This Catalog contains the product specifications, characteristics, data, materials, and structures as of 11/2014. The contents are subject to change without notice for specification changes or other reasons. When using a product listed in this Catalog, be sure to obtain the latest specifications.

2. All applications described in this Catalog exemplify the use of Fuji's products for your reference only. No right or license, either express or implied, under any patent, copyright, trade secret or other intellectual property right owned by Fuji Electric Co., Ltd. is (or shall be deemed) granted. Fuji Electric Co., Ltd. makes no representation or warranty, whether express or implied, relating to the infringement or alleged infringement of other's intellectual property rights which may arise from the use of the applications described herein.

3. Although Fuji Electric Co., Ltd. is enhancing product quality and reliability, a small percentage of semiconductor products may become faulty. When using Fuji Electric semiconductor products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury, fire, or other problem if any of the products become faulty. It is recommended to make your design fail-safe, flame retardant, and free of malfunction.

4. The products introduced in this Catalog are intended for use in the following electronic and electrical equipment which has normal reliability requirements.
   ・Computers ・OA equipment ・Communications equipment (terminal devices) ・Measurement equipment
   ・Machine tools ・Audiovisual equipment ・Electrical home appliances ・Personal equipment ・Industrial robots etc.

5. If you need to use a product in this Catalog for equipment requiring higher reliability than normal, such as for the equipment listed below, it is imperative to contact Fuji Electric Co., Ltd. to obtain prior approval. When using these products for such equipment, take adequate measures such as a backup system to prevent the equipment from malfunctioning even if a Fuji's product incorporated in the equipment becomes faulty.
   ・Transportation equipment (mounted on cars and ships) ・Trunk communications equipment
   ・Traffic-signal control equipment ・Gas leakage detectors with an auto-shut-off feature
   ・Emergency equipment for responding to disasters and anti-burglary devices ・Safety devices ・Medical equipment

6. Do not use products in this Catalog for the equipment requiring strict reliability such as the following and equivalents to strategic equipment (without limitation).
   ・Space equipment ・Aeronautic equipment ・Nuclear control equipment ・Submarine repeater equipment

7. Copyright (c)1996-2014 by Fuji Electric Co., Ltd. All rights reserved.
   No part of this Catalog may be reproduced in any form or by any means without the express permission of Fuji Electric Co., Ltd.

8. If you have any question about any portion in this Catalog, ask Fuji Electric Co., Ltd. or its sales agents before using the product. Neither Fuji Electric Co., Ltd. nor its agents shall be liable for any injury caused by any use of the products not in accordance with instructions set forth herein.

富士電機

Innovating Energy Technology

Technical Information

IGBT Modules

- Please refer to URLs below for futher information about products, application manuals and technical documents.
- 关于本规格书中没有记载的产品信息，应用手册，技术资料等，请参考以下链接。
- 本データシートに記載されていない製品情報，アプリケーションマニュアル，技術資料は以下の URL をご参照下さい。

FUJI ELECTRIC Power Semiconductor WEB site

日本	www.fujielectric.co.jp/products/semiconductor/
Global	www.fujielectric.com/products/semiconductor/
中国	www.fujielectric.com.cn/products/semiconductor/
Europe	www.fujielectric-europe.com/components/semiconductors/
North America	www.americas.fujielectric.com/components/semiconductors/

Information

日本	
1 半導体総合カタログ	www.fujielectric.co.jp/products/semiconductor/catalog/
2 製品情報	www.fujielectric.co.jp/products/semiconductor/model/
3 アプリケーションマニュアル	www.fujielectric.co.jp/products/semiconductor/model/igbt/application/
4 技術資料	www.fujielectric.co.jp/products/semiconductor/model/igbt/technical/
5 マウンティングインストラクション	www.fujielectric.co.jp/products/semiconductor/model/igbt/mounting/
6 IGBT 損失シミュレーションソフト	www.fujielectric.co.jp/products/semiconductor/model/igbt/simulation/
7 AT-NPC 3-Level 損失シュミレーションソフト	www.fujielectric.co.jp/products/semiconductor/model/igbt/simulation_3level/
8 富士電機技報	www.fujielectric.co.jp/products/semiconductor/journal/
9 製品のお問い合わせ	www.fujielectric.co.jp/products/semiconductor/contact/
10 改廃のお知らせ	www.fujielectric.co.jp/products/semiconductor/discontinued/

Global	
1 Semiconductors General Catalog	www.fujielectric.com/products/semiconductor/catalog/
2 Product Information	www.fujielectric.com/products/semiconductor/model/
3 Application Manuals	www.fujielectric.com/products/semiconductor/model/igbt/application/
4 Technical Documents	www.fujielectric.com/products/semiconductor/model/igbt/technical/
5 Mounting Instructions	www.fujielectric.com/products/semiconductor/model/igbt/mounting/
6 IGBT Loss Simulation Software	www.fujielectric.com/products/semiconductor/model/igbt/simulation/
7 AT-NPC 3-Level Loss Simulation Software	www.fujielectric.com/products/semiconductor/model/igbt/simulation_3level/
8 Fuji Electric Journal	www.fujielectric.com/products/semiconductor/journal/
9 Contact	www.fujielectric.com/products/semiconductor/contact/
10 Revised and discontinued product information	www.fujielectric.com/products/semiconductor/discontinued/

中国	
1 半导体综合目录	www.fujielectric.com.cn/products/semiconductor/catalog/
2 产品信息	www.fujielectric.com.cn/products/semiconductor/model/
3 应用手册	www.fujielectric.com.cn/products/semiconductor/model/igbt/application/
4 技术资料	www.fujielectric.com.cn/products/semiconductor/model/igbt/technical/
5 安装说明书	www.fujielectric.com.cn/products/semiconductor/model/igbt/mounting/
6 IGBT 损耗模拟软件	www.fujielectric.com.cn/products/semiconductor/model/igbt/simulation/
7 AT-NPC 3-Level 损耗模拟软件	www.fujielectric.com.cn/products/semiconductor/model/igbt/simulation_3level/
8 富士电机技报	www.fujielectric.com.cn/products/semiconductor/journal/
9 产品咨询	www.fujielectric.com.cn/products/semiconductor/contact/
10 产品更改和停产信息	www.fujielectric.com.cn/products/semiconductor/discontinued/