

9097250 TOSHIBA (DISCRETE/OPTO)

90D 16230 DT-33-35




SEMICONDUCTOR


TECHNICAL DATA

MG50G1BL3
MG50G1JL1
MG50G2CL3
MG50G2DL1
MG50G6EL1


Unit in mm




MG50G1BL3

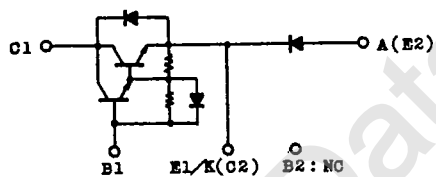


MG50G1JL1

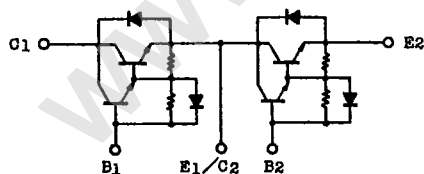

MG50G2CL3

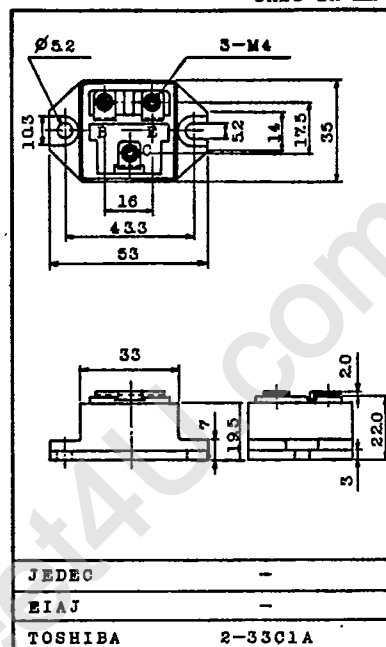

Weight : 86g

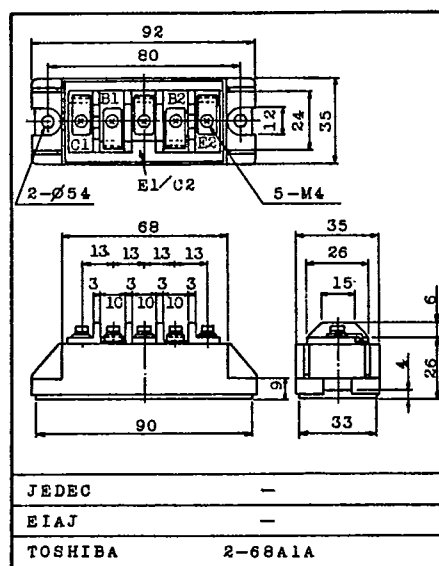

Weight : 210g

TOSHIBA CORPORATION

GT1A2A

9097250 TOSHIBA (DISCRETE/OPTO)

90D 16231



DT-33-35



SEMICONDUCTOR

TECHNICAL DATA

MG50G1BL3
 MG50G1JL1
 MG50G2CL3
 MG50G2DL1
 MG50G6EL1

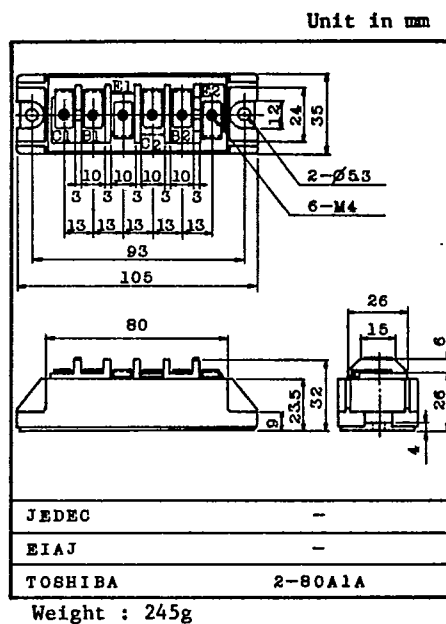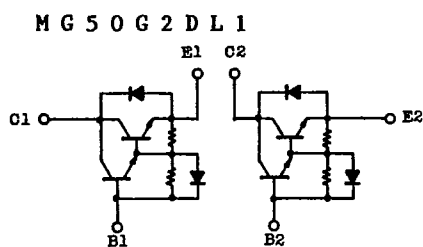



JEDEC

EIAJ

TOSHIBA

2-80A1A

Weight : 245g

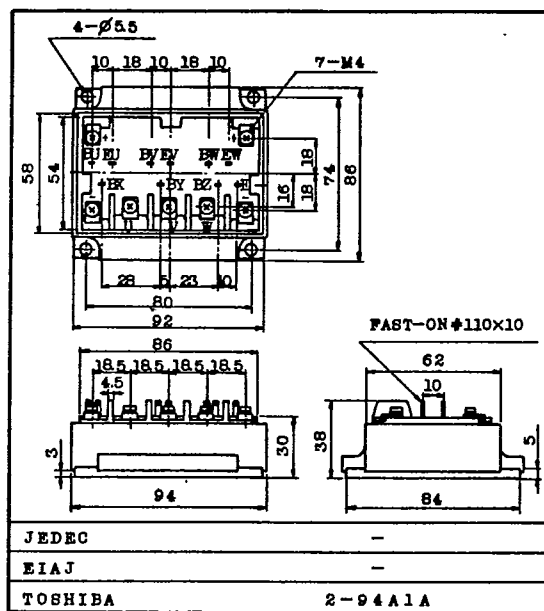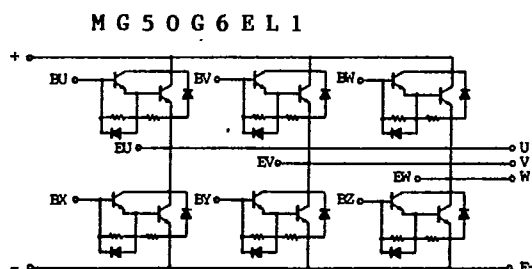

9097250 TOSHIBA (DISCRETE/OPTO)

90D 16232 DT-33-35



SEMICONDUCTOR

TECHNICAL DATA

M G 5 0 G 1 B L 3

M G 5 0 G 1 J L 1

M G 5 0 G 2 C L 3

M G 5 0 G 2 D L 1

M G 5 0 G 6 E L 1

MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V _{CB0}	600	V
Collector-Emitter Voltage	V _{CE0}	600	V
Collector-Emitter Sustaining Voltage	V _{CE0(SUS)}	450	V
Emitter-Base Voltage	V _{EB0}	6	V
Collector Current	DC I _C	50	A
	1ms I _C	100	A
	DC -I _C	50	A
Base Current	I _B	3	A
Collector Power Dissipation (Tc=25°C)	P _C	300	W
Junction Temperature	T _j	150	°C
Storage Temperature Range	T _{stg}	-40~125	°C
Isolation Voltage	V _{isol}	2500 (AC 1 Minute)	V
Screw Torque (Terminal/Mounting)		20/30	kg·cm

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I _{CB0}	V _{CB} =600V, I _E =0	-	-	1.0	mA
Emitter Cut-off Current	I _{EB0}	V _{EB} =6V, I _C =0	-	-	200	mA
Collector-Emitter Sustaining Voltage	V _{CE0(SUS)}	I _C =0.5A, L=40mH	450	-	-	V
DC Current Gain	h _{FE}	V _{CE} =5V, I _C =50A	100	-	-	
Collector-Emitter Saturation Voltage	V _{CE(sat)}	I _C =50A, I _B =1A	-	-	2.0	V
Base-Emitter Saturation Voltage	V _{BE(sat)}		-	-	2.5	V
Emitter-Collector Voltage	V _{ECO}	I _E =50A, I _B =0	-	-	1.5	V
Reverse Recovery Time	t _{rr}	-I _C =50A, V _{EB} =3V, V _{CE} =300V	-	-	2.0	μs
Switching Time	Turn-on Time		-	-	1.0	μs
	Storage Time		-	-	12	
	Fall Time		-	-	2.0	
Thermal Resistance (Junction to Case)	R _{th(j-c)}	Transistor	-	-	0.41	°C/W
		Diode	-	-	1.3	

TOSHIBA CORPORATION

GT1A2

9097250 TOSHIBA (DISCRETE/OPTO)



SEMICONDUCTOR

東芝

TECHNICAL DATA

90D 16233

DT-33-35






MG 50 G 1 B L 3

MG 50 G 1 J L 1

MG 50 G 2 C L 3

MG 50 G 2 D L 1

MG 50 G 6 E L 1

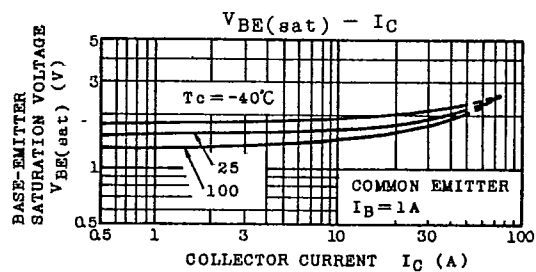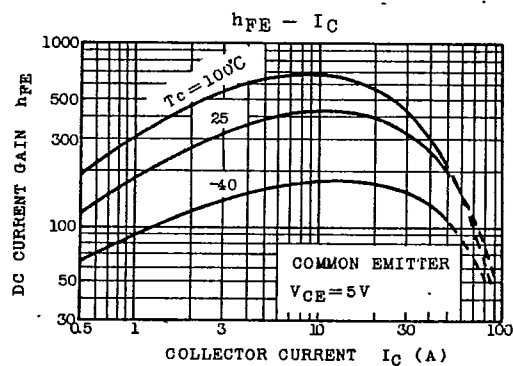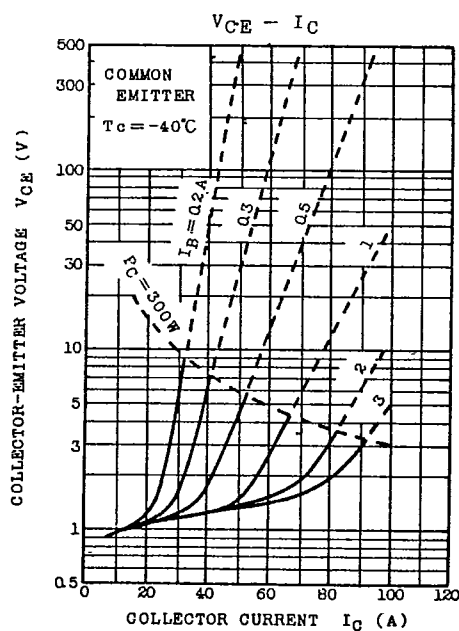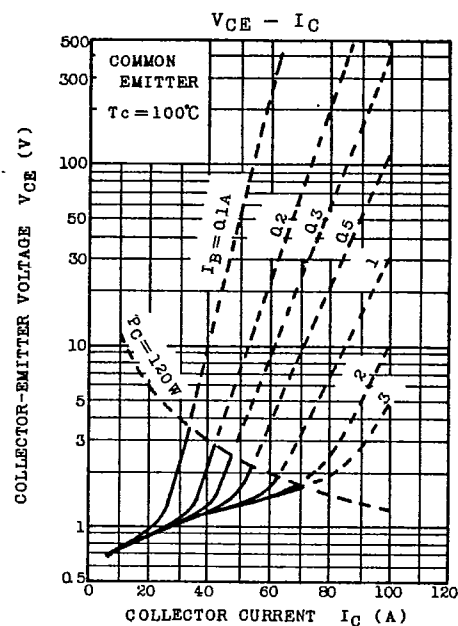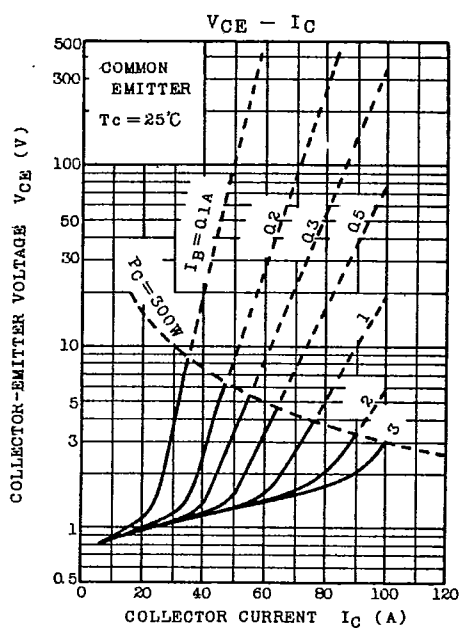

TOSHIBA CORPORATION

GT1A2

9097250 TOSHIBA (DISCRETE/OPTO)

90D 16234

DT-33-35



SEMICONDUCTOR

TECHNICAL DATA





MG50G1BL3

MG50G1JL1

MG50G2CL3

MG50G2DL1

MG50G6EL1

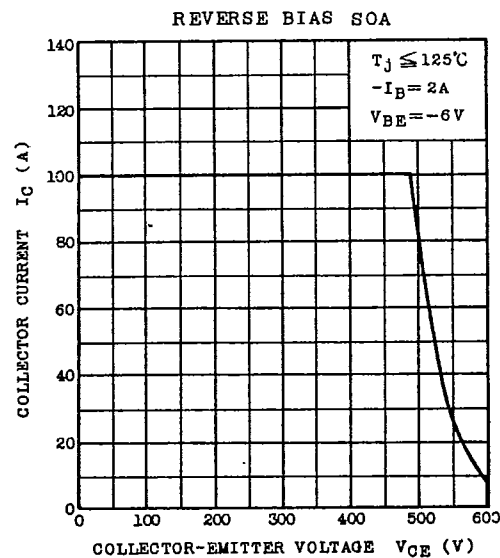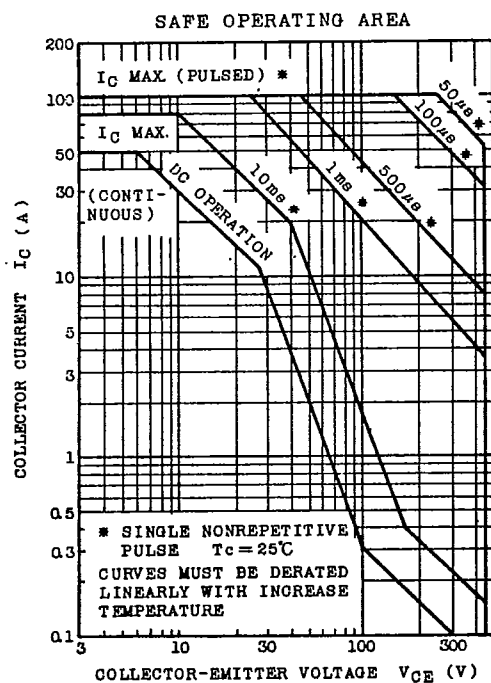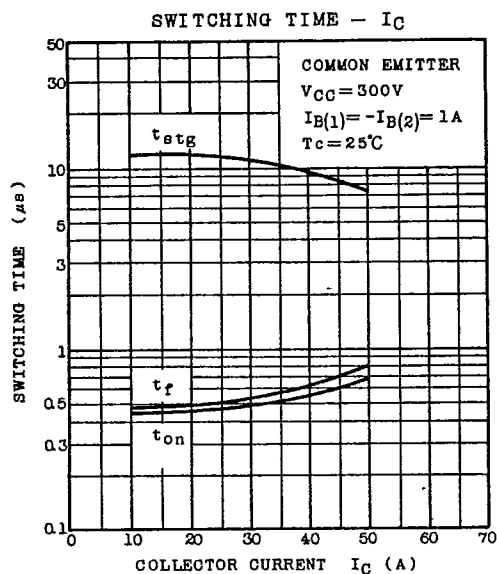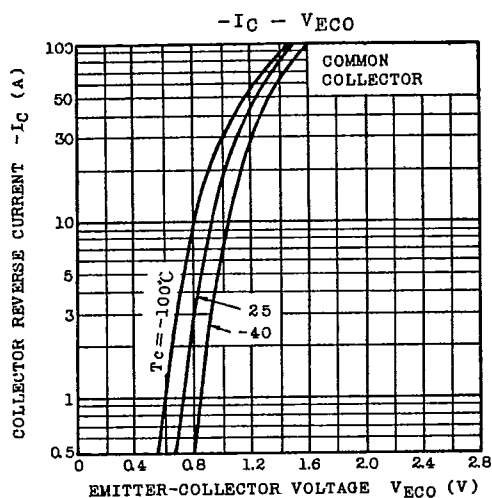

TOSHIBA CORPORATION

GT1A2

9097250 TOSHIBA (DISCRETE/OPTO)



90D 16235 DT-33-35



SEMICONDUCTOR

TECHNICAL DATA

MG50G1BL3
 MG50G1JL1
 MG50G2CL3
 MG50G2DL1
 MG50G6EL1

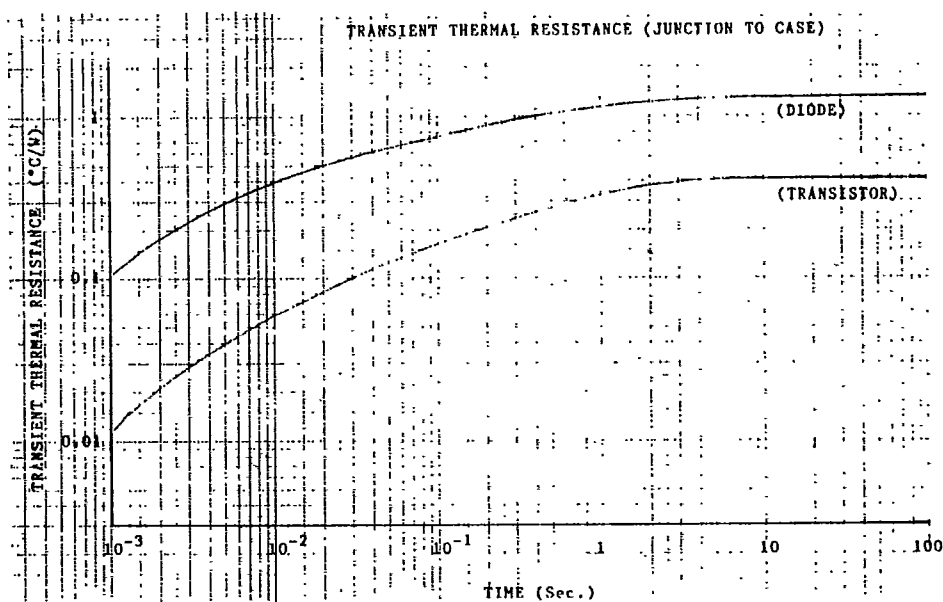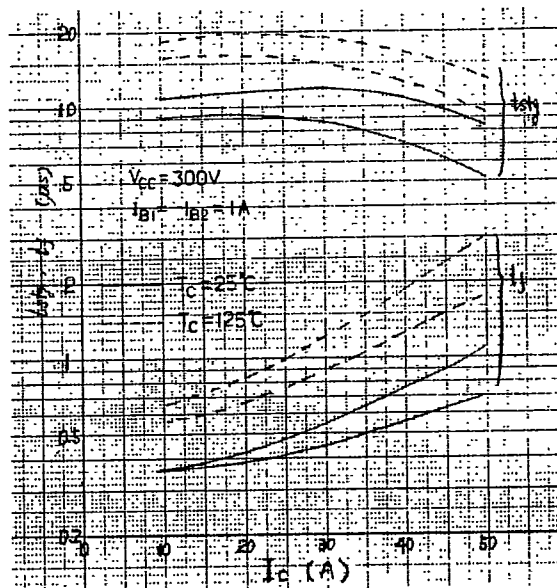

TOSHIBA CORPORATION

GT1A2A

9097250 TOSHIBA (DISCRETE/OPTO)



90D 16236 DT-33-35



SEMICONDUCTOR

TECHNICAL DATA

MG50G1BL3
MG50G1JL1
MG50G2CL3
MG50G2DL1
MG50G6EL1

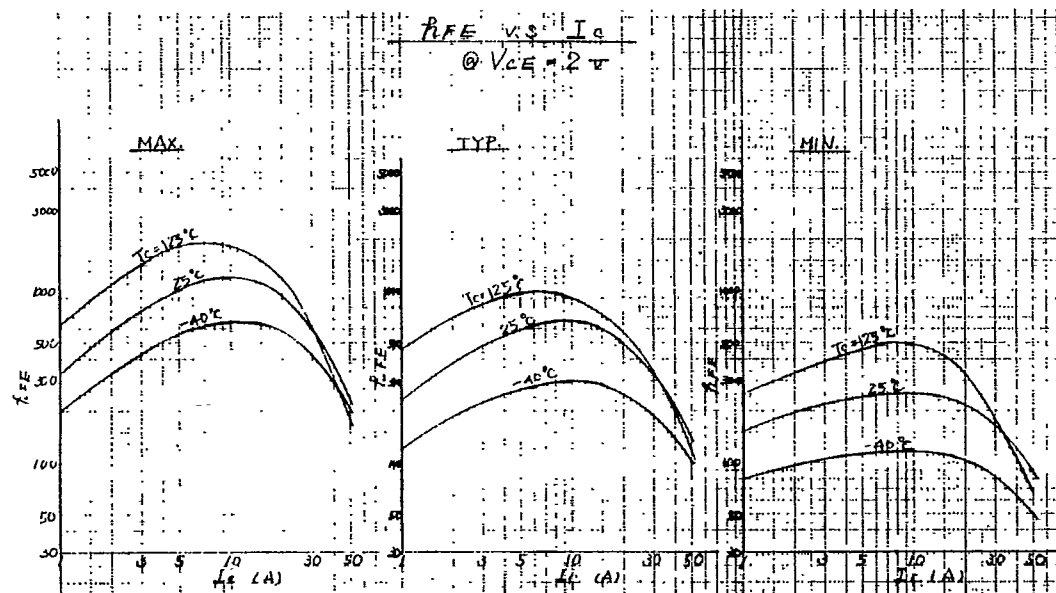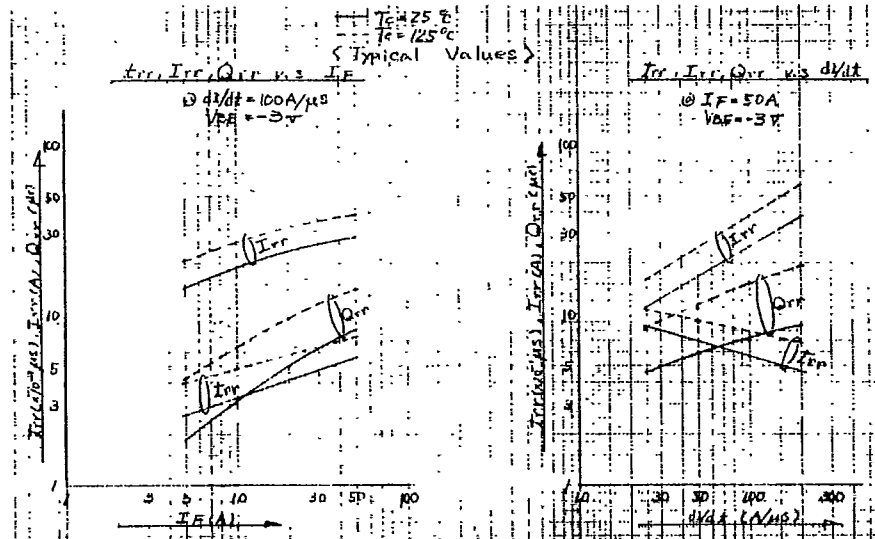

TOSHIBA CORPORATION

GT1A2A