

این دیتاشیت توسط توکل الکترونیک تهیه و ارائه شده است.
جهت مشاهده قیمت، موجودی و ثبت سفارش این قطعه به وبسایت توکل الکترونیک مراجعه فرمایید.



مشاهده قیمت و خرید
برای خرید و مشاهده سایر محصولات کلیک کنید



2SK1112

N-channel Enhancement Mode Power MOSFET


Features

- V_{DS} = 60V, I_D = 50A
R_{DS(ON)} < 73mΩ @ V_{GS} = 10V
R_{DS(ON)} < 85 mΩ @ V_{GS} = 4.5V

General Features

- Advanced Trench Technology
- Provide Excellent R_{DS(ON)} and Low Gate Charge
- Lead Free and Green Available


100% UIS TESTED!
100% ΔV_{ds} TESTED!



TO-252-2L Top View



Pin Assignment



Schematic Diagram

ABSOLUTE MAXIMUM RATINGS (T _C = 25 °C, unless otherwise noted)				
Parameter		Symbol	Limit	Unit
Drain-Source Voltage		V _{DS}	60	V
Gate-Source Voltage		V _{GS}	± 20	
Continuous Drain Current	T _C = 25 °C	I _D	18	A
	T _C = 70 °C		14	
Pulsed Drain Current (t = 300 μs)		I _{DM}	25	
Avalanche Current		I _{AS}	15	
Single Avalanche Energy ^a	L = 0.1 mH	E _{AS}	11.25	mJ
Maximum Power Dissipation ^a	T _C = 25 °C	P _D	41.7 ^b	W
	T _A = 25 °C ^c		2.1	
Operating Junction and Storage Temperature Range		T _J , T _{stg}	- 55 to 150	°C
THERMAL RESISTANCE RATINGS				
Parameter		Symbol	Limit	Unit
Junction-to-Ambient (PCB Mount) ^c		R _{thJA}	60	°C/W
Junction-to-Case (Drain)		R _{thJC}	3	


SPECIFICATIONS (T _J = 25 °C, unless otherwise noted)						
Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Static						
Drain-Source Breakdown Voltage	V _{DS}	V _{GS} = 0 V, I _D = 250 μA	60			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	1.0		3.0	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ± 20 V			± 250	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 60 V, V _{GS} = 0 V			1	μA
		V _{DS} = 60 V, V _{GS} = 0 V, T _J = 125 °C			50	
		V _{DS} = 60 V, V _{GS} = 0 V, T _J = 150 °C			250	
On-State Drain Current ^a	I _{D(on)}	V _{DS} ≥ 10 V, V _{GS} = 10 V	20			A
Drain-Source On-State Resistance ^a	R _{DS(on)}	V _{GS} = 10 V, I _D = 6.6 A		0.073		Ω
		V _{GS} = 4.5 V, I _D = 6 A		0.085		
Forward Transconductance ^a	g _{fs}	V _{DS} = 15 V, I _D = 6.6 A		25		S
Dynamic ^b						
Input Capacitance	C _{iss}	V _{DS} = 30 V, V _{GS} = 0 V, f = 1 MHz		660		pF
Output Capacitance	C _{oss}			85		
Reverse Transfer Capacitance	C _{rss}			40		
Total Gate Charge ^c	Q _g	V _{DS} = 30 V, V _{GS} = 10 V, I _D = 6.6 A		19.8	30	nC
Gate-Source Charge ^c	Q _{gs}			3.6		
Gate-Drain Charge ^c	Q _{gd}			4.1		
Gate Resistance	R _g	f = 1 MHz	0.4	2	4	Ω
Turn-On Delay Time ^c	t _{d(on)}	V _{DD} = 30 V, R _L = 9.6 Ω I _D ≅ 5.2 A, V _{GEN} = 10 V, R _g = 1 Ω		8	16	ns
Rise Time ^c	t _r			11	20	
Turn-Off Delay Time ^c	t _{d(off)}			18	27	
Fall Time ^c	t _f			5	10	
Turn-On Delay Time ^c	t _{d(on)}	V _{DD} = 30 V, R _L = 9.6 Ω I _D ≅ 5.2 A, V _{GEN} = 4.5 V, R _g = 1 Ω		38	57	
Rise Time ^c	t _r			58	87	
Turn-Off Delay Time ^c	t _{d(off)}			18	27	
Fall Time ^c	t _f			8	16	
Drain-Source Body Diode Ratings and Characteristics ^b T _C = 25 °C						
Continuous Current	I _S				18	A
Pulsed Current	I _{SM}				25	
Forward Voltage ^a	V _{SD}	I _F = 5.2 A, V _{GS} = 0 V		0.8	1.5	V
Reverse Recovery Time	t _{rr}	I _F = 5.2 A, dI/dt = 100 A/μs		34	51	ns
Peak Reverse Recovery Current	I _{RM(REC)}			3	5	A
Reverse Recovery Charge	Q _{rr}				50	75

Notes:


- Pulse test; pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$.
- Guaranteed by design, not subject to production testing.
- Independent of operating temperature.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

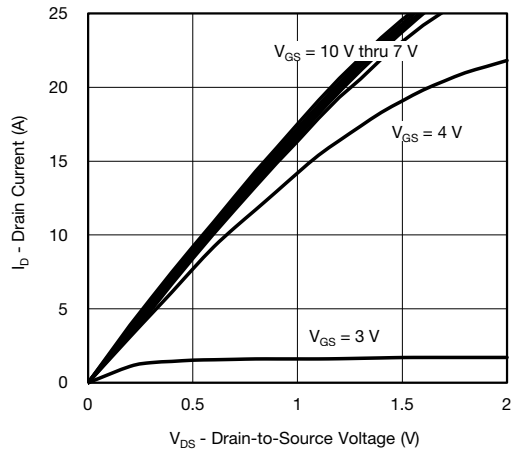


Output Characteristics

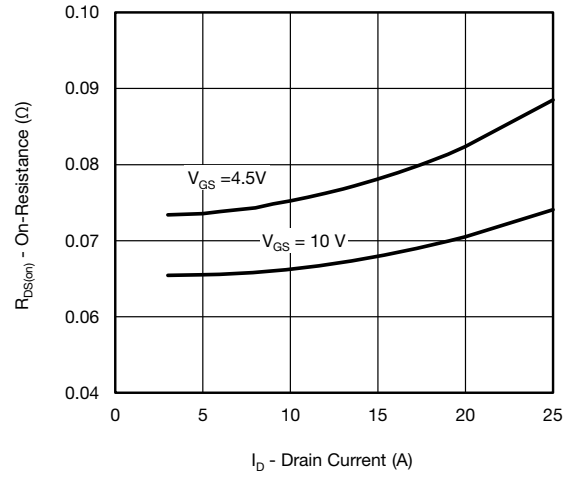


On-Resistance vs. Drain Current

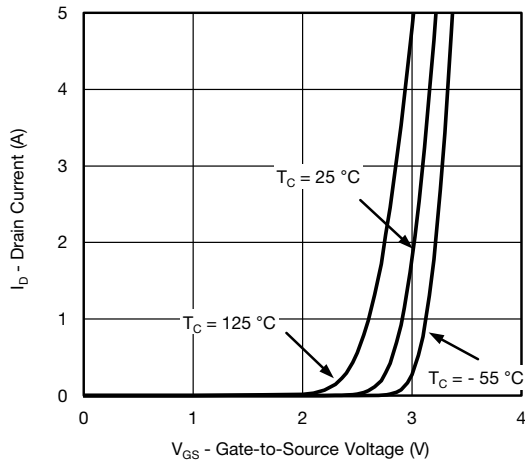


Transfer Characteristics

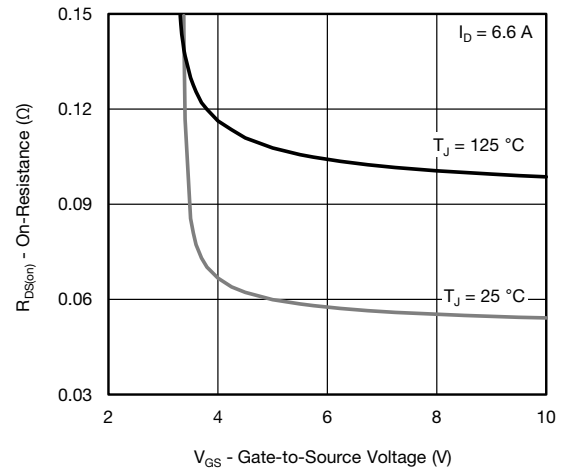







On-Resistance vs. Gate-to-Source Voltage

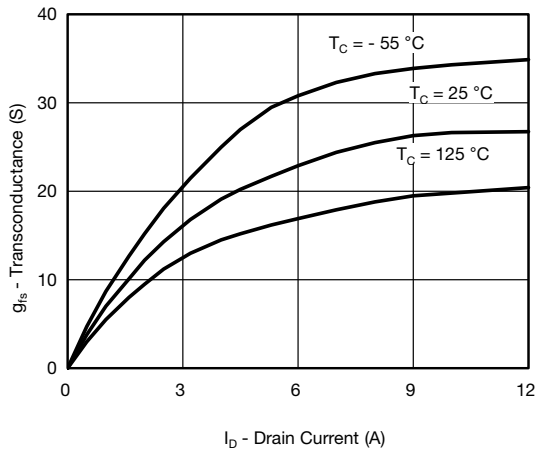



Transconductance

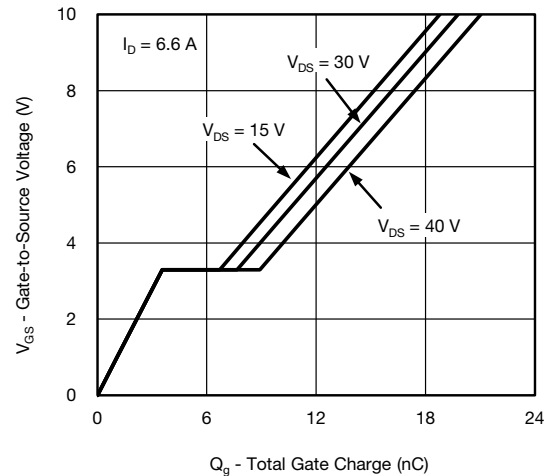

Gate Charge

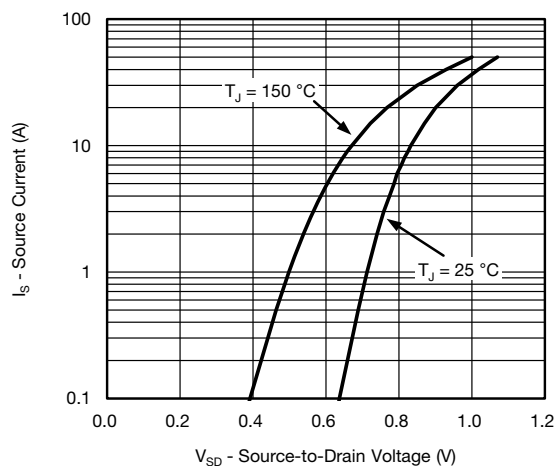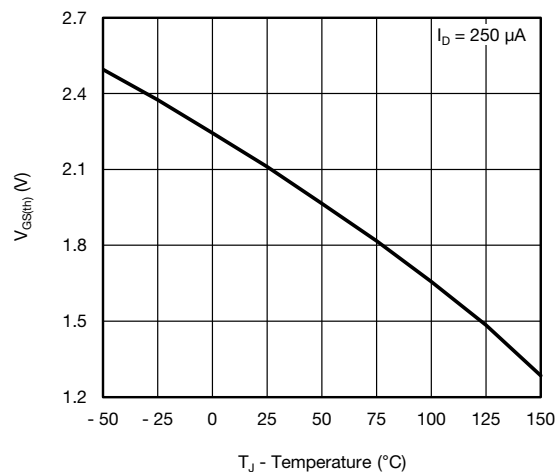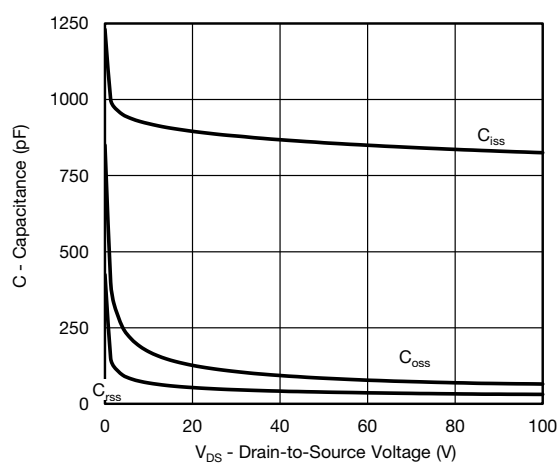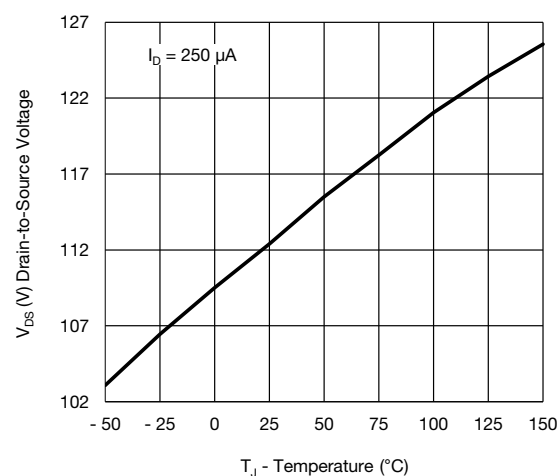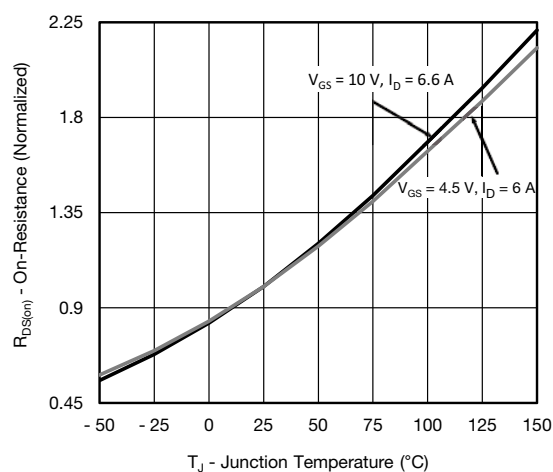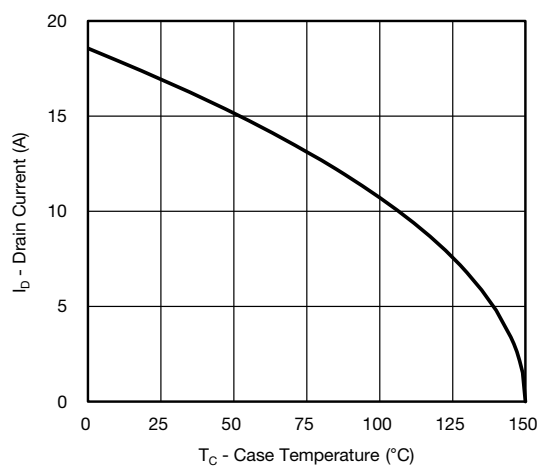
TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)**Source-Drain Diode Forward Voltage****Threshold Voltage****Capacitance****Drain Source Breakdown vs. Junction Temperature****On-Resistance vs. Junction Temperature****Current Derating**

TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

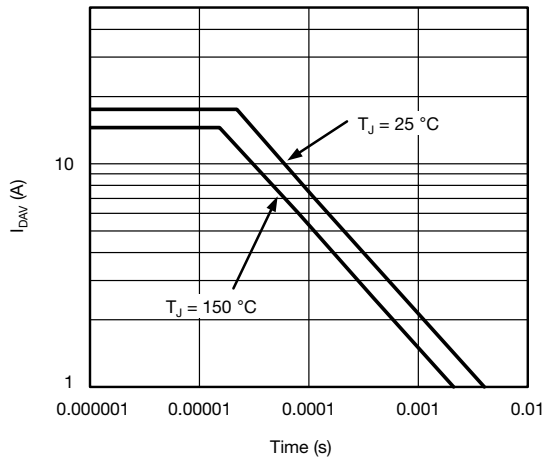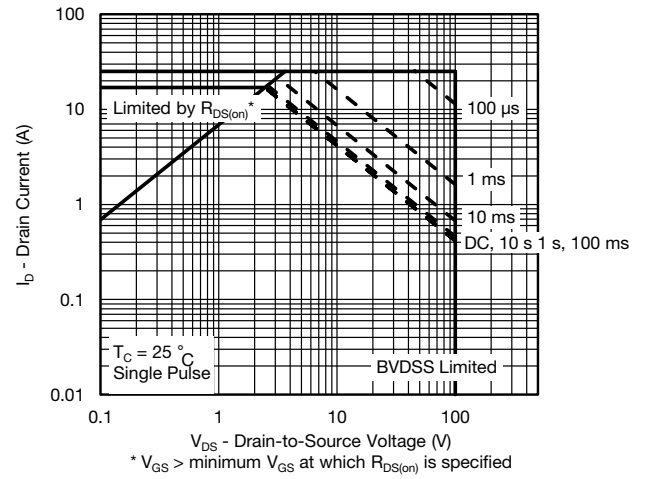

Single Pulse Avalanche Current Capability vs. Time

Safe Operating Area

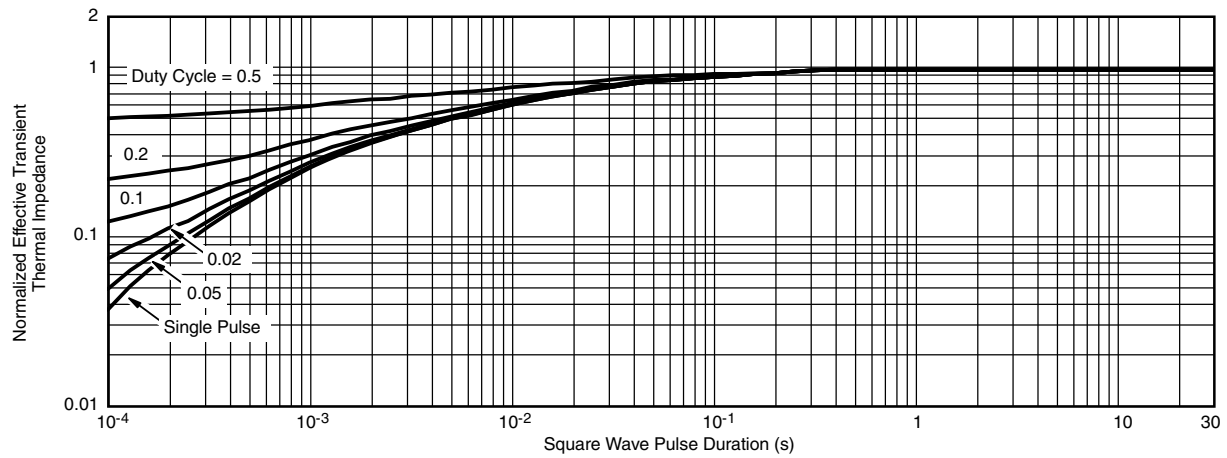

Normalized Thermal Transient Impedance, Junction-to-Case