TAVAKOL ELECTRONIC
توکل الکترونیک
مرجع تخصصی تأمین قطعات الکترونیکی اورجینال

این دیتاشیت توسط توکل الکترونیک تهیه و ارائه شده است.
جهت مشاهده قیمت، موجودی و ثبت سفارش این قطعه به وب‌سایت توکل الکترونیک مراجعه فرمایید.

مشاهده قیمت و خرید
برای خرید و مشاهده سایر محصولات کلیک کنید

INCHANGE SEMICONDUCTOR

isc N-Channel MOSFET Transistor 2SK1601

DESCRIPTION

- Drain Current –I_D= 3A@ T_C=25℃
- Drain Source Voltage-
  : V_{DSS}=900V(Min)
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

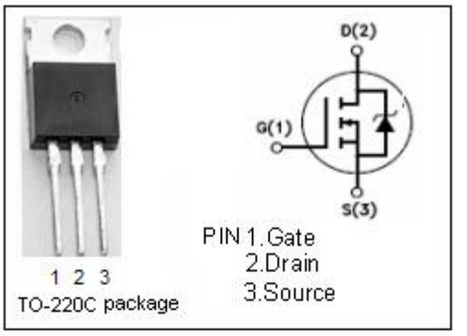

APPLICATIONS

- Designed for high voltage, high speed power switching applications such as switching regulators, converters, solenoid and relay drivers.

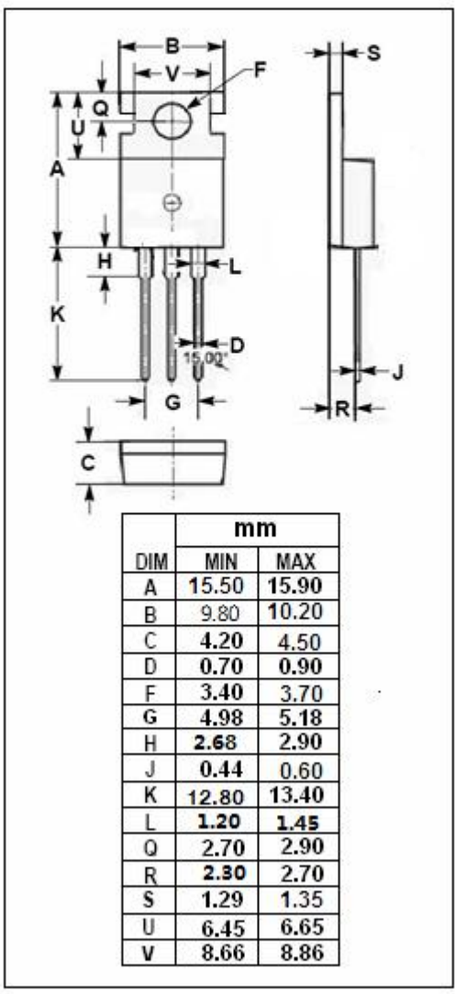

DIM	mm MIN	MAX
A	15.50	15.90
B	9.80	10.20
C	4.20	4.50
D	0.70	0.90
F	3.40	3.70
G	4.98	5.18
H	2.68	2.90
J	0.44	0.60
K	12.80	13.40
L	1.20	1.45
Q	2.70	2.90
R	2.30	2.70
S	1.29	1.35
U	6.45	6.65
V	8.66	8.86

ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	ARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage (V_{GS}=0)	900	V
V_{GS}	Gate-Source Voltage	±30	V
I_D	Drain Current-continuous@ TC=25℃	3	A
P_{tot}	Total Dissipation@TC=25℃	75	W
T_j	Max. Operating Junction Temperature	150	℃
T_{stg}	Storage Temperature Range	-55~150	℃

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j\text{-}c}$	Thermal Resistance,Junction to Case	3.125	℃/W
$R_{th\ j\text{-}a}$	Thermal Resistance,Junction to Ambient	62.5	℃/W

isc N-Channel Mosfet Transistor 2SK1601

• **ELECTRICAL CHARACTERISTICS (T_C=25℃)**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	V_{GS}=0; I_D= 10mA	900			V
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=10 V_{GS}; I_D=1mA	1.5		3.5	V
$R_{DS(on)}$	Drain-Source On-stage Resistance	V_{GS}=10V; I_D=1.5A			6.4	Ω
I_{GSS}	Gate Source Leakage Current	V_{GS}= ±25V;V_{DS}= 0			±100	nA
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=720V; V_{GS}= 0			100	uA
V_{SD}	Diode Forward Voltage	I_F=3A; V_{GS}=0			2.0	V
tr	Rise time	V_{GS}=10V;I_D=1.5A;R_L=267Ω		25	50	ns
ton	Turn-on time			40	60	ns
tf	Fall time			40	80	ns
toff	Turn-off time			150	300	ns

NOTICE：
ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.
ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.
ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.