

این دیتاشیت توسط توکل الکترونیک تهیه و ارائه شده است.
جهت مشاهده قیمت، موجودی و ثبت سفارش این قطعه به وبسایت توکل الکترونیک مراجعه فرمایید.



مشاهده قیمت و خرید

برای خرید و مشاهده سایر محصولات کلیک کنید



+441276694800 TOSHIBA ELECTRONICS

332 P02 01.02.00 10:58

SEMICONDUCTOR TOSHIBA TECHNICAL DATA

TOSHIBA FIELD EFFECT TRANSISTOR 2SK2039 SILICON N CHANNEL MOS TYPE (π -MOS II.5)

317-5431

HIGH SPEED, HIGH CURRENT SWITCHING APPLICATIONS.
DC-DC CONVERTER AND MOTOR DRIVE
APPLICATIONS.

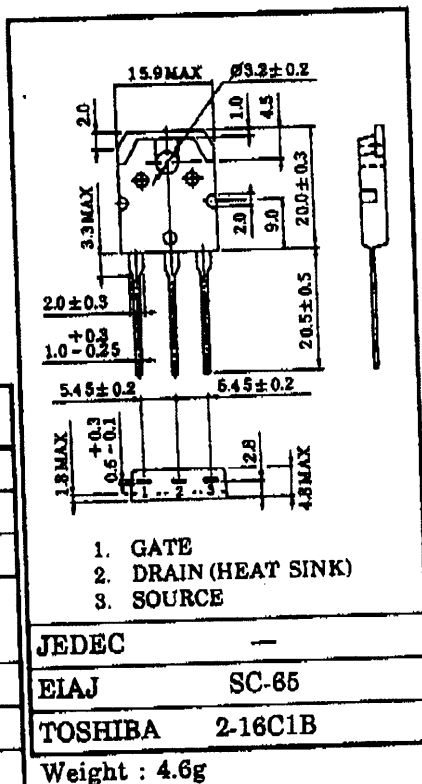
- Low Drain-Source ON Resistance : $R_{DS(ON)} = 1.9\Omega$ (Typ.)
- High Forward Transfer Admittance : $|Y_{fs}| = 1.7S$ (Typ.)
- Low Leakage Current : $I_{DSS} = 300\mu A$ (Max.) @ $V_{DS} = 720V$
- Enhancement-Mode : $V_{th} = 1.5 \sim 3.5V$ @ $V_{DS} = 10V$, $I_D = 1mA$

MAXIMUM RATINGS ($T_a = 25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Drain-Source Voltage	V_{DS}	900	V
Drain-Gate Voltage ($R_{GS} = 20k\Omega$)	V_{DGR}	900	V
Gate-Source Voltage	V_{GSS}	± 30	V
Drain Current	DC	I_D	5
	Pulse	I_{DP}	15
Drain Power Dissipation ($T_c = 25^\circ C$)	P_D	150	W
Channel Temperature	T_{ch}	150	$^\circ C$
Storage Temperature Range	T_{stg}	$-55 \sim 150$	$^\circ C$

INDUSTRIAL APPLICATIONS

Unit in mm



THERMAL CHARACTERISTICS

CHARACTERISTIC	SYMBOL	MAX.	UNIT
Thermal Resistance, Channel to Case	$R_{th(ch-c)}$	0.833	$^\circ C/W$
Thermal Resistance, Channel to Ambient	$R_{th(ch-a)}$	50	$^\circ C/W$

THIS TRANSISTOR IS AN ELECTROSTATIC SENSITIVE DEVICE. PLEASE HANDLE WITH CAUTION.

© The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.

2SK2039 - 1

1992 - 6 - 24

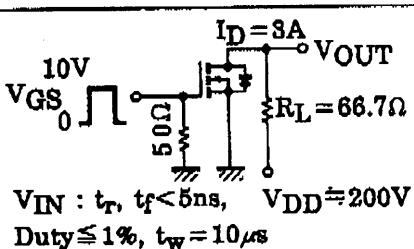
TOSHIBA CORPORATION

SEMICONDUCTOR

TOSHIBA

TECHNICAL DATA

2SK2039**ELECTRICAL CHARACTERISTICS (Ta = 25°C)**

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current		I_{GSS}	$V_{GS} = \pm 30V, V_{DS} = 0V$	—	—	± 100	nA
Drain Cut-off Current		I_{DSS}	$V_{DS} = 720V, V_{GS} = 0V$	—	—	300	μA
Drain-Source Breakdown Voltage		$V_{(BR)DSS}$	$I_D = 10mA, V_{GS} = 0V$	900	—	—	V
Gate Threshold Voltage		V_{th}	$V_{DS} = 10V, I_D = 1mA$	1.5	—	3.5	V
Drain-Source ON Resistance		$R_{DS(ON)}$	$V_{GS} = 10V, I_D = 3A$	—	1.9	2.5	Ω
Forward Transfer Admittance		$ Y_{fs} $	$V_{DS} = 20V, I_D = 3A$	1.0	3.0	—	S
Input Capacitance		C_{iss}	$V_{DS} = 25V, V_{GS} = 0V, f = 1MHz$	—	690	980	pF
Reverse Transfer Capacitance		C_{rss}		—	65	110	
Output Capacitance		C_{oss}		—	120	180	
Switching Time	Rise Time	t_r		—	30	60	ns
	Turn-on Time	t_{on}		—	70	140	
	Fall Time	t_f		—	40	80	
	Turn-off Time	t_{off}		—	210	420	
Total Gate Charge (Gate-Source Plus Gate-Drain)		Q_g	$V_{DD} = 400V, V_{GS} = 10V, I_D = 5A$	—	55	110	nC
Gate-Source Charge		Q_{gs}		—	25	—	
Gate-Drain ("Miller") Charge		Q_{gd}		—	30	—	

SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Continuous Drain Reverse Current	I_{DR}	—	—	—	5	A
Pulse Drain Reverse Current	I_{DRP}	—	—	—	15	A
Diode Forward Voltage	V_{DSF}	$I_{DR} = 5A, V_{GS} = 0V$	—	—	-1.9	V
Reverse Recovery Time	t_{rr}	$I_{DR} = 5A, V_{GS} = 0V$	—	1450	—	ns
Reverse Recovered Charge	Q_{rr}	$dI_{DR}/dt = 100A/\mu s$	—	20	—	μC

2SK2039 - 2

1992 - 6 - 24

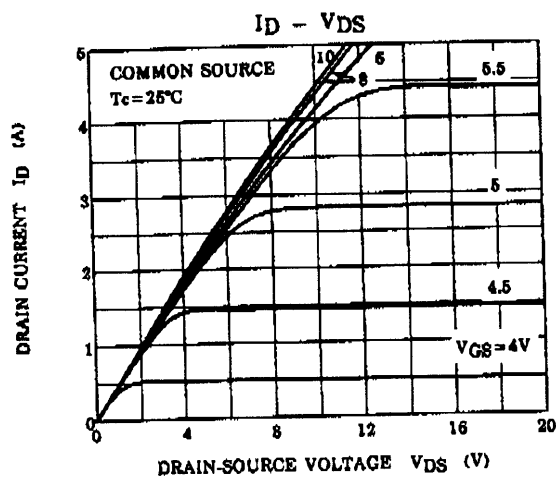
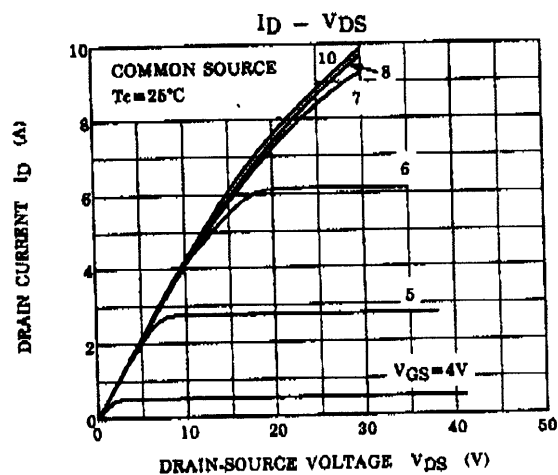
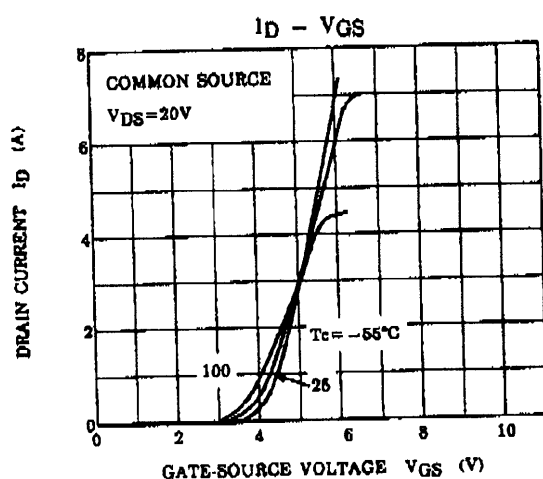
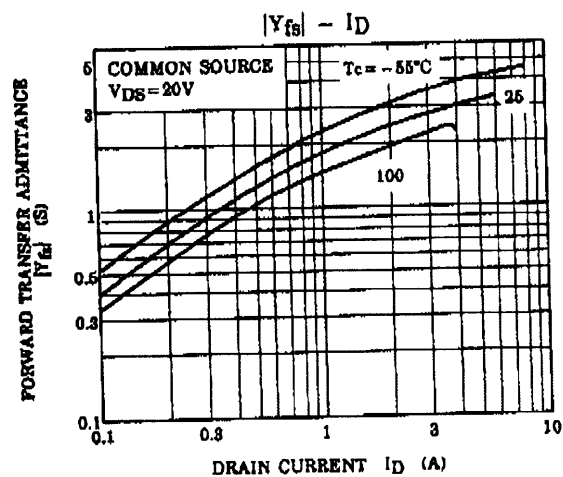
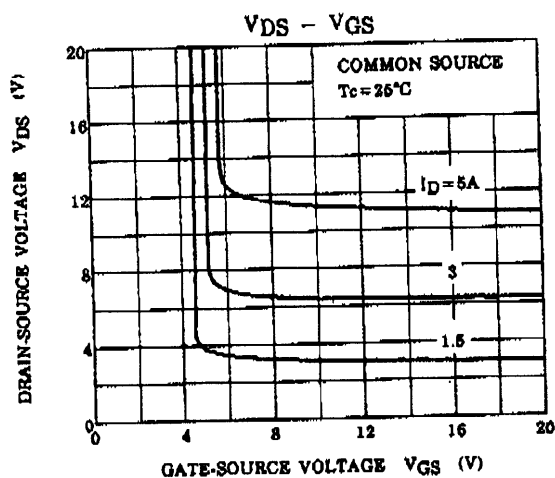
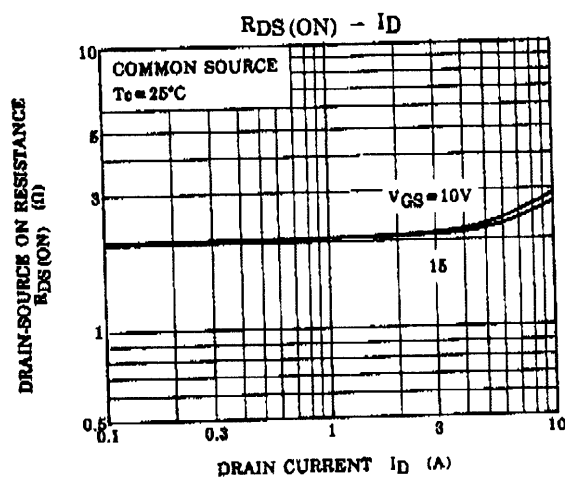
TOSHIBA CORPORATION

SEMICONDUCTOR

TOSHIBA

TECHNICAL DATA

2SK2039



2SK2039 - 3

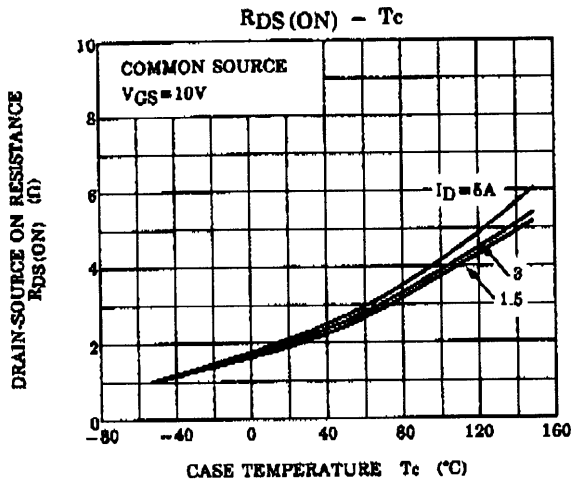
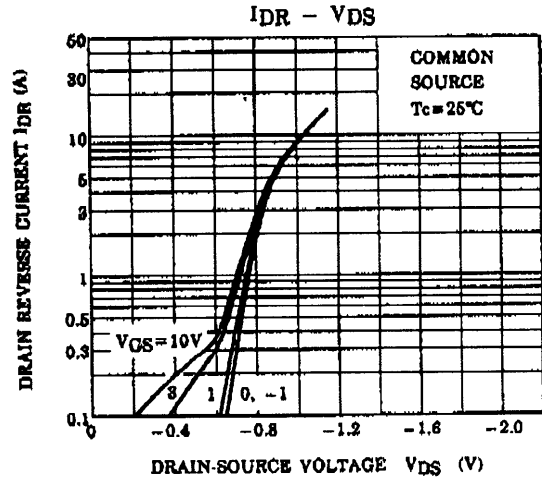
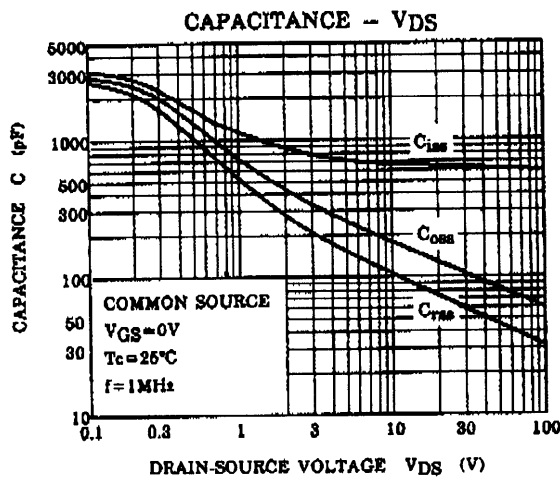
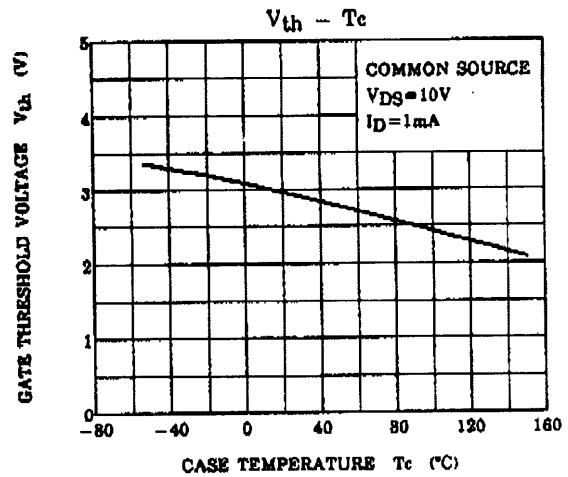
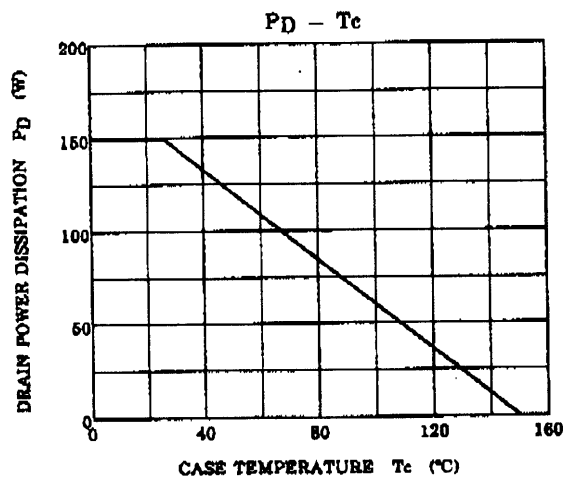
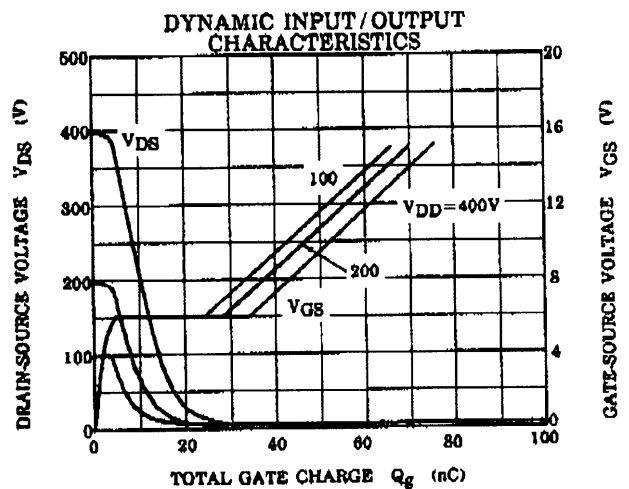
1992 - 6 - 24

TOSHIBA CORPORATION

SEMICONDUCTOR

TOSHIBA

TECHNICAL DATA

2SK2039

2SK2039 - 4

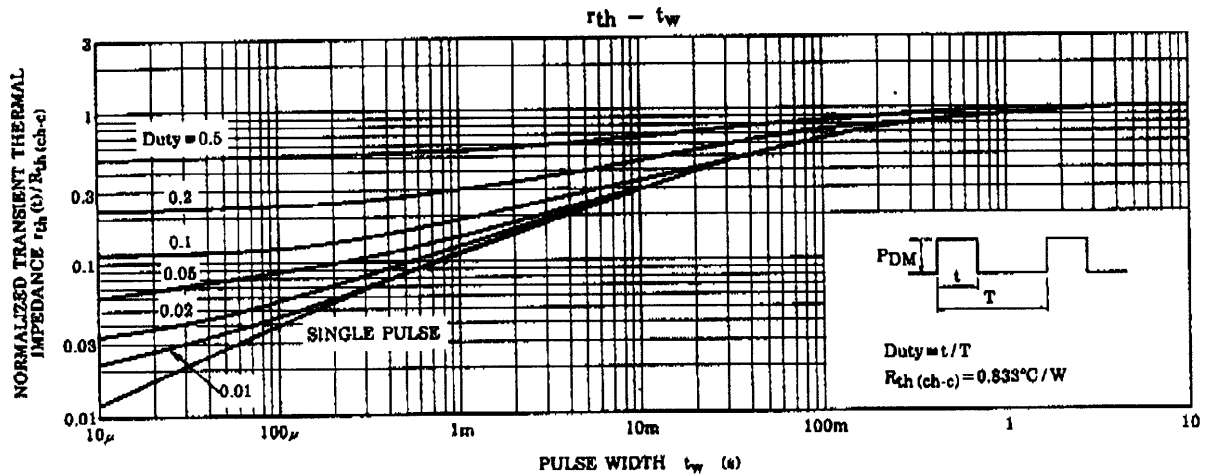
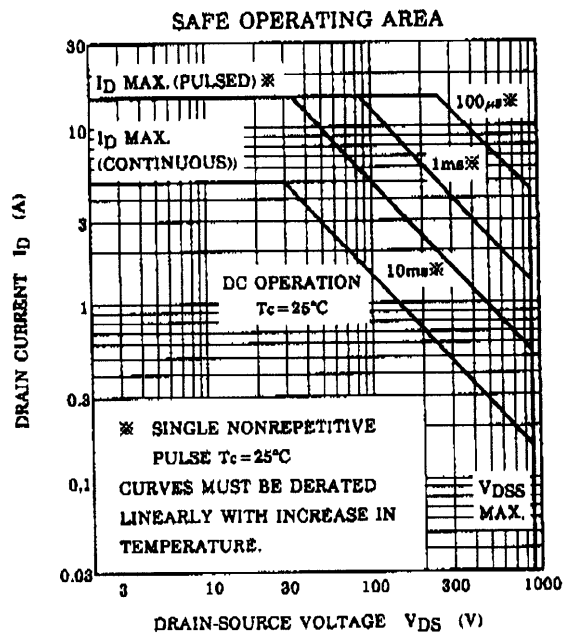
1992 - 6 - 24

TOSHIBA CORPORATION

SEMICONDUCTOR

TOSHIBA

TECHNICAL DATA

2SK2039

25K2039 - 5*

1992 - 6 - 24

TOSHIBA CORPORATION