

این دیتاشیت توسط توکل الکترونیک تهیه و ارائه شده است.
جهت مشاهده قیمت، موجودی و ثبت سفارش این قطعه به وبسایت توکل الکترونیک مراجعه فرمایید.

**مشاهده قیمت و خرید**

برای خرید و مشاهده سایر محصولات کلیک کنید

**CMB80N03 /CMP80N03****N-Ch 30V Fast Switching MOSFETs****General Description**

The 80N03 is N-ch MOSFETs with extreme high cell density, which provide excellent RDS(on) and gate charge for most of the synchronous buck converter applications.

Features

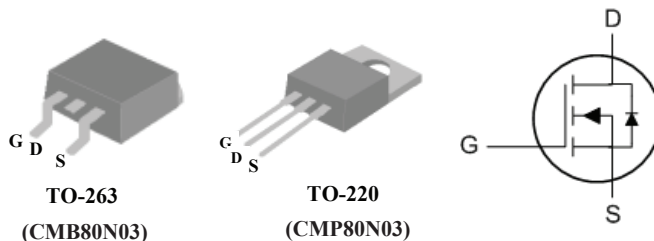
- Simple Drive Requirement
- Fast Switching
- Low On-Resistance

Product Summary

BVDSS	RDS(on)	ID
30V	5.2mΩ	80A

Applications

- LED POWER CONTROLLER
- DC-DC & DC-AC CONVERTERS
- HIGH CURRENT, HIGH SPEED SWITCHING
- SOLENOID AND RELAY DRIVERS
- MOTOR CONTROL, AUDIO AMPLIFIERS

TO263 / TO220 Pin Configuration**Absolute Maximum Ratings**

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	30	V
V _{GS}	Gate-Source Voltage	±20	V
I _D @T _C =25°C	Continuous Drain Current ¹	80	A
I _D @T _C =100°C	Continuous Drain Current ¹	50	A
I _{DM}	Pulsed Drain Current ²	220	A
EAS	Single Pulse Avalanche Energy ³	400	mJ
I _{AS}	Avalanche Current	50	A
P _D @T _C =25°C	Total Power Dissipation	120	W
T _{STG}	Storage Temperature Range	-55 to 175	°C
T _J	Operating Junction Temperature Range	-55 to 175	°C

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
R _{θJA}	Thermal Resistance Junction-ambient ¹	---	62	°C/W
R _{θJC}	Thermal Resistance Junction-case	---	1.5	°C/W

N-Ch 30V Fast Switching MOSFETs

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=250\mu A$	30	---	---	V
$\Delta BV_{DSS}/\Delta T_J$	BVDSS Temperature Coefficient	Reference to 25°C , $I_D=1mA$	---	0.035	---	V/ $^\circ\text{C}$
$R_{DS(ON)}$	Static Drain-Source On-Resistance ²	$V_{GS}=10V$, $I_D=40A$	---	---	5.2	$m\Omega$
		$V_{GS}=4.5V$, $I_D=20A$	---	---	10	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=250\mu A$	1.3	---	2.2	V
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=24V$, $V_{GS}=0V$	---	---	1	μA
		$V_{DS}=24V$, $V_{GS}=0V$, $T_C=125^\circ\text{C}$	---	---	25	
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V$, $V_{DS}=0V$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{DS}=10V$, $I_D=40A$	---	50	---	S
R_g	Gate Resistance	$V_{DS}=0V$, $V_{GS}=0V$, $f=1MHz$	---	---	3.3	Ω
Q_g	Total Gate Charge	$I_D=40A$	---	---	42	nC
Q_{gs}	Gate-Source Charge	$V_{DS}=24V$	---	---	52	
Q_{gd}	Gate-Drain Charge	$V_{GS}=5V$	---	---	26	
$T_{d(on)}$	Turn-On Delay Time	$V_{DS}=15V$	---	9.9	---	ns
T_r	Rise Time	$I_D=40A$	---	100	---	
$T_{d(off)}$	Turn-Off Delay Time	$R_G=3.3\Omega$, $V_{GS}=10V$	---	37	---	
T_f	Fall Time	$R_D=0.37\Omega$	---	60	---	
C_{iss}	Input Capacitance	$V_{DS}=25V$, $V_{GS}=0V$, $f=1MHz$	---	1950	---	pF
C_{oss}	Output Capacitance		---	895	---	
C_{rss}	Reverse Transfer Capacitance		---	315	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current ¹	$V_G=V_D=0V$, Force Current	---	---	80	A
I_{SM}	Pulsed Source Current ²		---	---	220	A
V_{SD}	Diode Forward Voltage ²	$V_{GS}=0V$, $I_S=40A$, $T_J=25^\circ\text{C}$	---	---	1.28	V

Note :

1.The data tested by surface mounted on a 1 inch² FR-4 board with 20Z copper.2.The data tested by pulsed , pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$ 3.The EAS data shows Max. rating . The test condition is $V_{DD}=25V$, $V_{GS}=10V$, $L=0.1mH$, $I_{AS}=48A$