

این دیتاشیت توسط توکل الکترونیک تهیه و ارائه شده است.
جهت مشاهده قیمت، موجودی و ثبت سفارش این قطعه به وبسایت توکل الکترونیک مراجعه فرمایید.



مشاهده قیمت و خرید

برای خرید و مشاهده سایر محصولات کلیک کنید



isc®

INCHANG SEMICONDUCTOR

isc N-Channel Mosfet Transistor

IRF3710

• FEATURES

- Drain Current $-I_D=57A@ T_C=25^{\circ}C$
- Drain Source Voltage-
: $V_{DSS}= 100V(\text{Min})$
- Static Drain-Source On-Resistance
: $R_{DS(on)} = 23m\Omega (\text{Max})$
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

• DESCRIPTION



- Designed for high efficiency switch mode power supplies, Power factor correction and electronic lamp ballasts based on half bridge.

• ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	100	V
V_{GS}	Gate-Source Voltage-Continuous	± 20	V
I_D	Drain Current-Continuous	57	A
I_{DM}	Drain Current-Single Plused	230	A
P_D	Total Dissipation @ $T_C=25^{\circ}C$	200	W
T_j	Max. Operating Junction Temperature	-55~175	$^{\circ}C$
T_{stg}	Storage Temperature	-55~175	$^{\circ}C$

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	0.75	$^{\circ}C/W$
$R_{th j-a}$	Thermal Resistance, Junction to Ambient	62	$^{\circ}C/W$

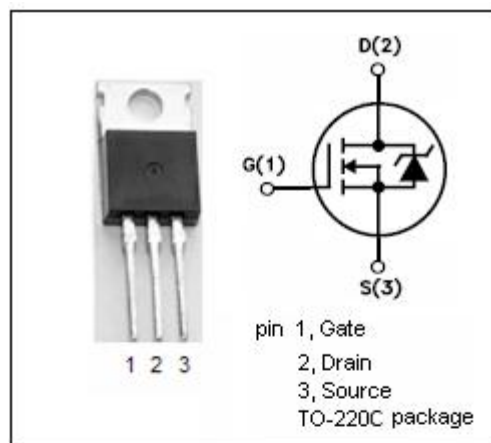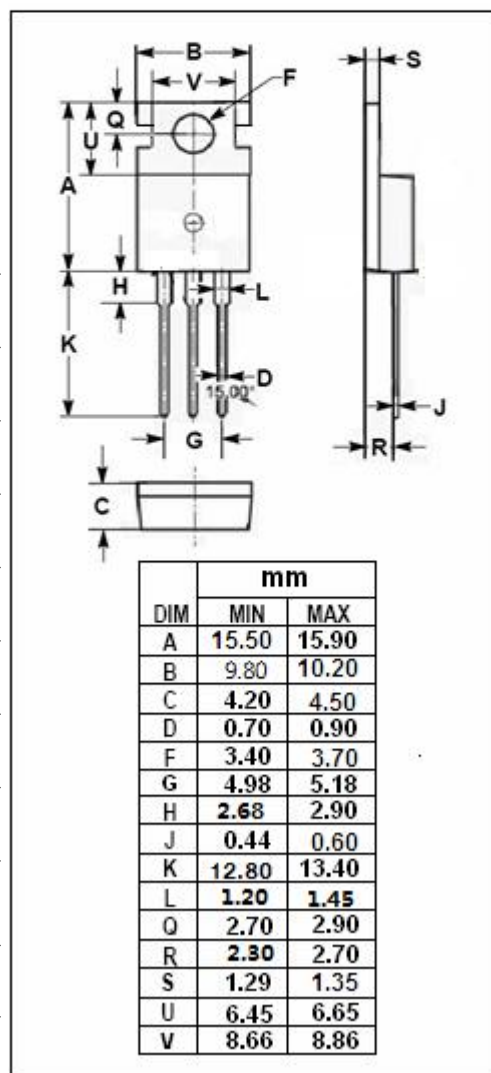

isc N-Channel Mosfet Transistor**IRF3710****ELECTRICAL CHARACTERISTICS****T_C=25°C unless otherwise specified**

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
V _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0; I _D = 0.25mA	100		V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} ; I _D = 0.25mA	2	4	V
R _{DS(on)}	Drain-Source On-Resistance	V _{GS} = 10V; I _D = 28A		0.023	Ω
I _{GSS}	Gate-Body Leakage Current	V _{GS} = ±20V; V _{DS} = 0		±100	nA
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = 100V; V _{GS} =0		25	uA
V _{SD}	Forward On-Voltage	I _S = 28A; V _{GS} =0		1.2	V

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.

•