TAVAKOL ELECTRONIC
توکل الکترونیک
مرجع تخصصی تأمین قطعات الکترونیکی اورجینال
این دیتاشیت توسط توکل الکترونیک تهیه و ارائه شده است.
جهت مشاهده قیمت، موجودی و ثبت سفارش این قطعه به وب‌سایت توکل الکترونیک مراجعه فرمایید.
مشاهده قیمت و خرید
برای خرید و مشاهده سایر محصولات کلیک کنید

isc®

INCHANGE SEMICONDUCTOR

isc N-Channel MOSFET Transistor IRFB4227，IIRFB4227

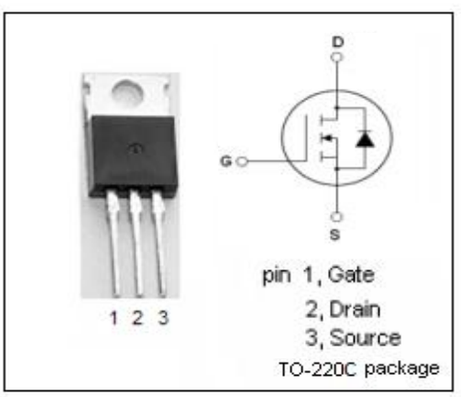

- **FEATURES**
- Static drain-source on-resistance:
  R_{DS}(on) ≤24mΩ
- Enhancement mode
- Fast Switching Speed
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

- **DESCRITION**
- 175℃ operating junction temperature and high repetitive peak current capability

- **ABSOLUTE MAXIMUM RATINGS(T_a=25℃)**

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	200	V
V_{GS}	Gate-Source Voltage	±30	V
I_D	Drain Current-Continuous	65	A
I_{DM}	Drain Current-Single Pulsed	260	A
P_D	Total Dissipation @T_C=25℃	330	W
T_j	Max. Operating Junction Temperature	175	℃
T_{stg}	Storage Temperature	-40~175	℃

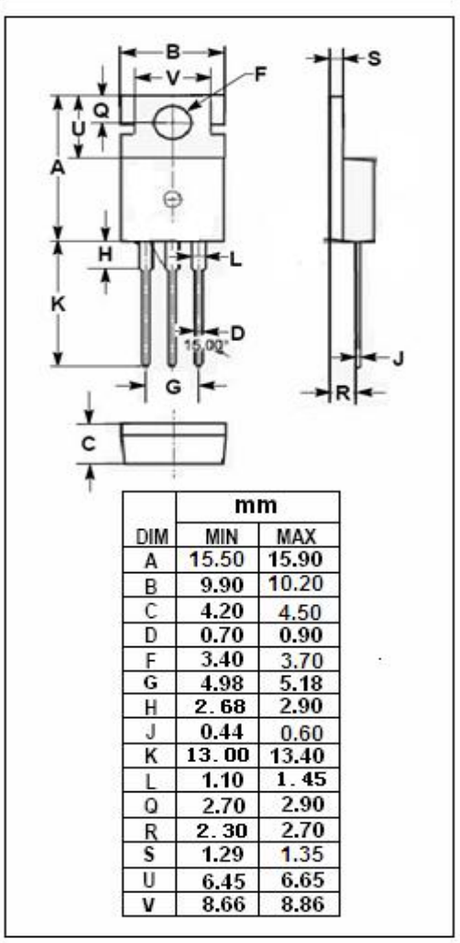

DIM	mm MIN	MAX
A	15.50	15.90
B	9.90	10.20
C	4.20	4.50
D	0.70	0.90
F	3.40	3.70
G	4.98	5.18
H	2.68	2.90
J	0.44	0.60
K	13.00	13.40
L	1.10	1.45
Q	2.70	2.90
R	2.30	2.70
S	1.29	1.35
U	6.45	6.65
V	8.66	8.86

- **THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
Rth(ch-c)	Channel-to-case thermal resistance	0.45	℃/W
Rth(ch-a)	Channel-to-ambient thermal resistance	62	℃/W

isc N-Channel MOSFET Transistor IRFB4227，IIRFB4227

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V; I_D =250 μA	200			V
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}; I_D =250 μA	3		5	V
$R_{DS(on)}$	Drain-Source On-Resistance	V_{GS}=10V; I_D=46A			24	mΩ
I_{GSS}	Gate-Source Leakage Current	V_{GS}= ±20V			±0.1	μA
I_{DSS}	Drain-Source Leakage Current	V_{DS}=200V; V_{GS}= 0V			20	μA
V_{SD}	Diode forward voltage	Is=46A; V_{GS} = 0V			1.3	V

NOTICE：

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.