TAVAKOL ELECTRONIC
توکل الکترونیک
مرجع تخصصی تأمین قطعات الکترونیکی اورجینال
این دیتاشیت توسط توکل الکترونیک تهیه و ارائه شده است.
جهت مشاهده قیمت، موجودی و ثبت سفارش این قطعه به وب‌سایت توکل الکترونیک مراجعه فرمایید.
مشاهده قیمت و خرید
برای خرید و مشاهده سایر محصولات کلیک کنید
www.DataSheet.in

INTERNATIONAL RECTIFIER

INTERNATIONAL RECTIFIER IOR

REPETITIVE AVALANCHE AND dv/dt RATED

HEXFET® TRANSISTORS

IRFR9020
IRFR9022
IRFU9020
IRFU9022



P-CHANNEL

D-PAK

–50 Volt, 0.20 Ohm HEXFET

The HEXFET® technology is the key to International Rectifier's advanced line of power MOSFET transistors. The efficient geometry and unique processing of this latest "State of the Art" design achieves: very low on-state resistance combined with high transconductance; superior reverse energy and diode recovery dv/dt capability.

The HEXFET transistors also feature all of the well established advantages of MOSFETs such as voltage control, very fast switching, ease of paralleling and temperature stability of the electrical parameters.

Surface mount packages enhance circuit performance by reducing stray inductances and capacitance. The D-Pak (TO-252AA) surface mount package brings the advantages of HEXFETs to high volume applications where PC Board surface mounting is desirable. The surface mount option IRFR9020 is provided on 16mm tape. The straight lead option IRFU9020 of the device is called the I-Pak (TO-251AA).

They are well suited for applications where limited heat dissipation is required such as, computers and peripherals, telecommunications equipment, DC/DC converters, and a wide range of consumer products.

Product Summary

Part Number	BV_{DSS}	$R_{DS(on)}$	I_D
IRFR9020	–50V	0.28Ω	–9.9A
IRFR9022	–50V	0.33Ω	–9.0A
IRFU9020	–50V	0.28Ω	–9.9A
IRFU9022	–50V	0.33Ω	–9.0A

FEATURES:

- Surface Mountable (Order As IRFR9020)
- Straight Lead Option (Order As IRFU9020)
- Repetitive Avalanche Ratings
- Dynamic dv/dt Rating
- Simple Drive Requirements
- Ease of Paralleling

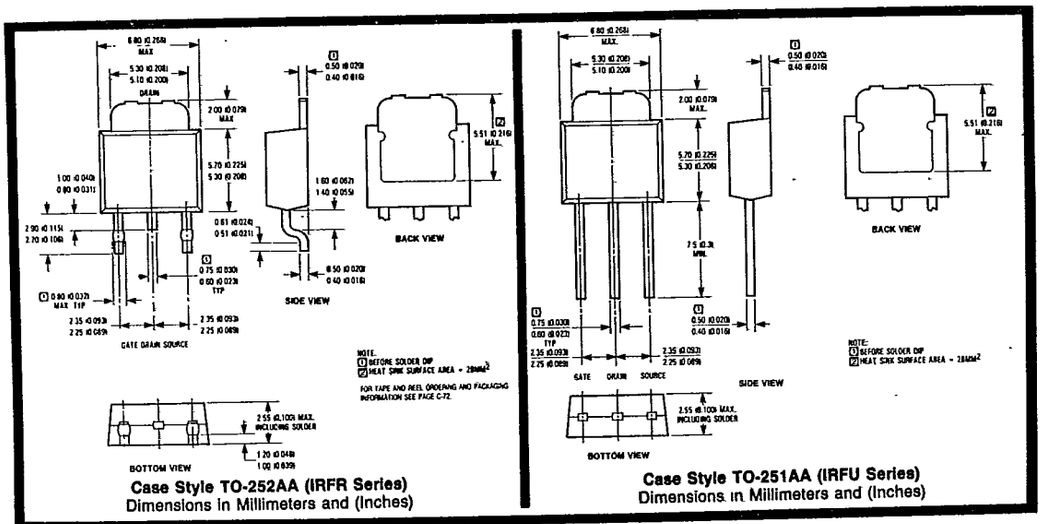

Case Style TO-252AA (IRFR Series)
Dimensions in Millimeters and (Inches)

Case Style TO-251AA (IRFU Series)
Dimensions in Millimeters and (Inches)

www.DataSheet.in

Absolute Maximum Ratings

Parameter		IRFR9020, IRFU9020	IRFR9022, IRFU9022	Units
I_D @ T_C = 25°C	Continuous Drain Current	−9.9	−9.0	A
I_D @ T_C = 100°C	Continuous Drain Current	−6.3	−5.7	A
I_{DM}	Pulsed Drain Current ①	−40	−36	A
P_D @ T_C = 25°C	Max. Power Dissipation	42		W
	Linear Derating Factor	0.33		W/K ⑤
V_{GS}	Gate-to-Source Voltage	±20		V
E_{AS}	Single Pulse Avalanche Energy ②	440 (See Fig. 14)		mJ
I_{AR}	Avalanche Current (Repetitive or Non-Repetitive) ①	−9.9 (See E_{AR})		A
E_{AR}	Repetitive Avalanche Energy ①	4.2 (See I_{AR})		mJ
dv/dt	Peak Diode recovery dv/dt ③	5.8 (See Fig. 17)		V/ns
T_J T_{STG}	Operating Junction Storage Temperature Range	−55 to 150		°C
	Lead Temperature	300 (0.063 in. (1.6mm) from case for 10s)		°C

Electrical Characteristics @ T_J = 25°C (Unless Otherwise Specified)

Parameter		Type	Min.	Typ.	Max.	Units	Test Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	All	−50			V	V_{GS} = 0V, I_D = −250µA
$R_{DS(on)}$	Static Drain-to-Source On-State Resistance ④	IRFR9020 IRFU9020	—	0.20	0.28	Ω	V_{GS} = −10V, I_D = 5.7A
		IRFR9022 IRFU9022	—	0.28	0.33		
$I_{D(on)}$	On-State Drain Current ④	IRFR9020 IRFU9020	−9.9	—	—	A	V_{DS} > $I_{D(on)}$ × $R_{DS(on)}$ Max. V_{GS} = −10V
		IRFR9022 IRFU9022	−9.0				
$V_{GS(th)}$	Gate Threshold Voltage	ALL	−2.0	—	−4.0	V	V_{DS} = V_{GS}, I_D = −250µA
g_{fs}	Forward Transconductance ④	ALL	2.3	3.5	—	S(℧)	V_{DS} ≤ −50V, I_{DS} = −5.7A
I_{DSS}	Zero Gate Voltage Drain Current	ALL	—	—	250	µA	V_{DS} = Max. Rating, V_{GS} = 0V
			—	—	1000		V_{DS} = 0.8 × Max. Rating V_{GS} = 0V, T_J = 125°C
I_{GSS}	Gate-to-Source Leakage Forward	ALL	—	—	−500	nA	V_{GS} = −20V
I_{GSS}	Gate-to-Source Leakage Reverse	ALL	—	—	500	nA	V_{GS} = 20V
Q_g	Total Gate Charge	ALL	—	9.4	14	nC	V_{GS} = −10V, I_D = −9.7A V_{DS} = 0.8 × Max. Rating See Fig. 16 (Independent or operating temperature)
Q_{gs}	Gate-to-Source Charge	ALL	—	4.3	6.5	nC	
Q_{gd}	Gate-to-Drain ("Miller") Charge		—	4.3	6.5	nC	
$t_{d(on)}$	Turn-On Delay Time	ALL	—	8.2	12	ns	V_{DD} = −25V, I_D ≈ −9.7A, R_G = 18Ω R_D = 2.4Ω See Fig. 15 (Independent of operating temperature)
t_r	Rise Time	ALL	—	57	86	ns	
$t_{d(off)}$	Turn-Off Delay Time	ALL	—	12	18	ns	
t_f	Fall Time	ALL	—	25	38	ns	
L_D	Internal Drain Inductance	ALL	—	4.5	—	nH	Measured from the drain lead, 6mm (0.25 in.) from package to center of die.
L_S	Internal Source Inductance	ALL	—	7.5	—	nH	Measured from the source lead, 6mm (0.25 in.) from package to source bonding pad.
C_{iss}	Input Capacitance	ALL	—	490	—	pF	V_{GS} = 0V, V_{DS} = −25V f = 1.0 MHz See Fig. 10
C_{oss}	Output Capacitance	ALL	—	320	—	pF	
C_{rss}	Reverse Transfer Capacitance	ALL	—	70	—	pF	

Modifed MOSFET symbol showing the internal inductances.



www.DataSheet.in

Source-Drain Diode Ratings and Characteristics

	Parameter	Type	Min.	Typ.	Max.	Units	Test Conditions
I_S	Continuous Source Current (Body Diode)	ALL	—	—	-9.9	A	Modified MOSFET symbol showing the integral Reverse p-n junction rectifier.
I_{SM}	Pulsed Source Current (Body Diode) ①	ALL	—	—	-40	A	
V_{SD}	Diode Forward Voltage ④	ALL	—	—	-6.3	V	T_J = 25°C, I_S = -9.9A, V_{GS} = 0V
t_{rr}	Reverse Recovery Time	ALL	56	110	280	ns	T_J = 25°C, I_F = -9.7A, di/dt = 100 A/µs
Q_{RR}	Reverse Recovery Charge	ALL	0.17	0.34	0.85	µC	
t_{on}	Forward Turn-On Time	ALL	Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by L_S + L_D.				

Thermal Resistance

R_{thJC}	Junction-to-Case	ALL	—	—	3.0	K/W⑤	
R_{thCS}	Case-to-Sink	ALL	—	1.7	—	K/W⑤	Typical solder mount ⑥
R_{thJA}	Junction-to-Ambient	ALL	—	—	110	K/W⑤	Typical socket mount

D-PAK

① Repetitive Rating; Pulse width limited by maximum junction temperature (see figure 5)

② @ V_{DD} = -25V, Starting T_J = 25°C, L = 5.1 mH, R_G = 25Ω, Peak I_L = -9.9A

③ I_{SD} ≤ -9.9A, di/dt ≤ -120A/µs, V_{DD} ≤ 40V, T_J ≤ 150°C Suggested R_G = 18Ω

④ Pulse width ≤ 300 µs; Duty Cycle ≤ 2%

⑤ K/W = °C/W W/K = W/°C

⑥ Mounting pad must cover heatsink surface area. See case style drawing on front page.

The information shown on the following graphs applies also to the IRFU devices.

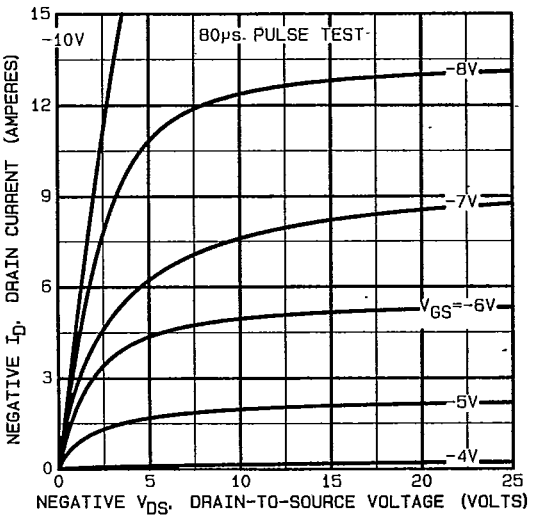

Fig. 1 — Typical Output Characteristics

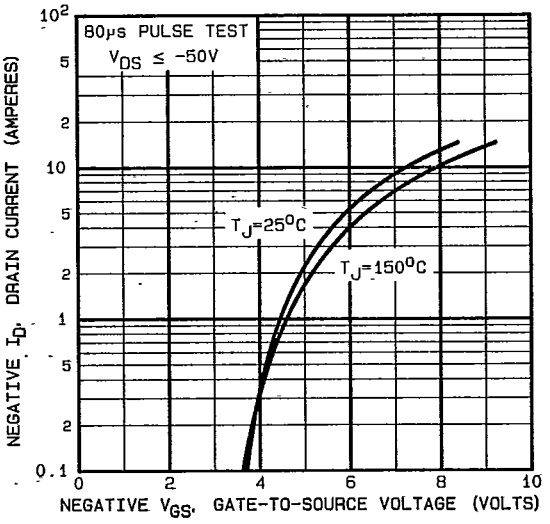

Fig. 2 — Typical Transfer Characteristics

www.DataSheet.in

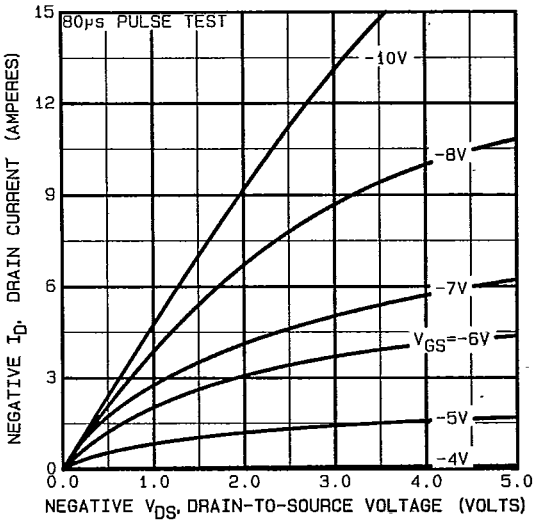

Fig. 3 — Typical Saturation Characteristics

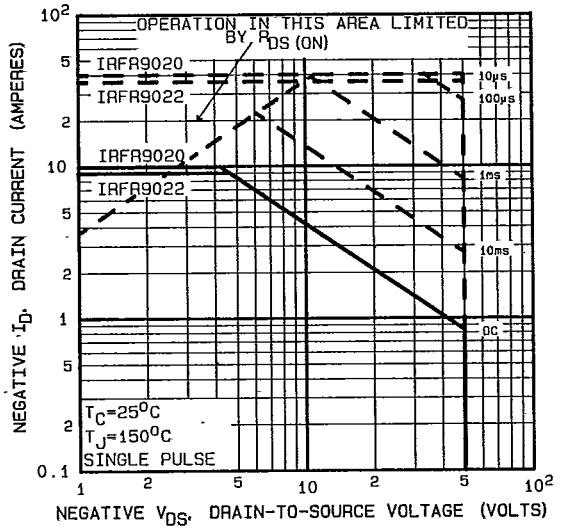

Fig. 4 — Maximum Safe Operating Area

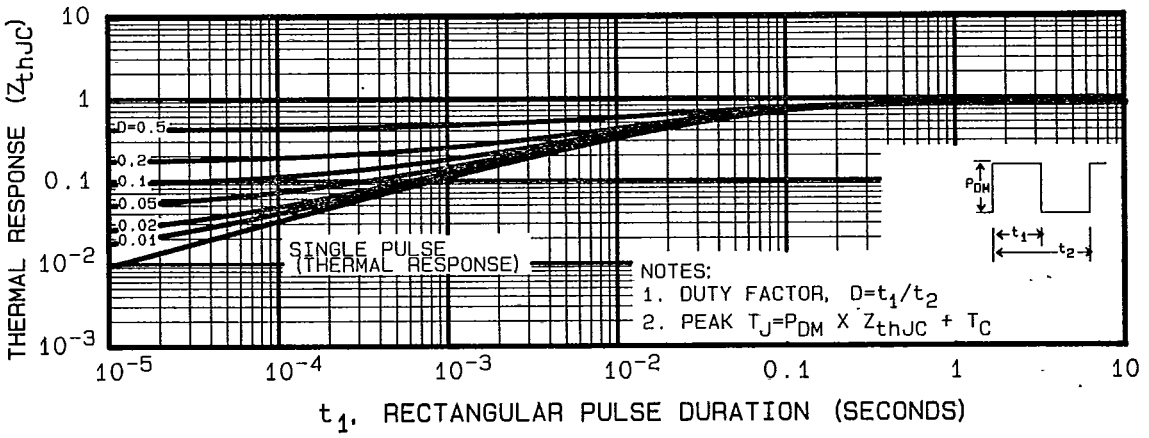

Fig. 5 — Maximum Effective Transient Thermal Impedance, Junction-to-Case Vs. Pulse Duration

www.DataSheet.in

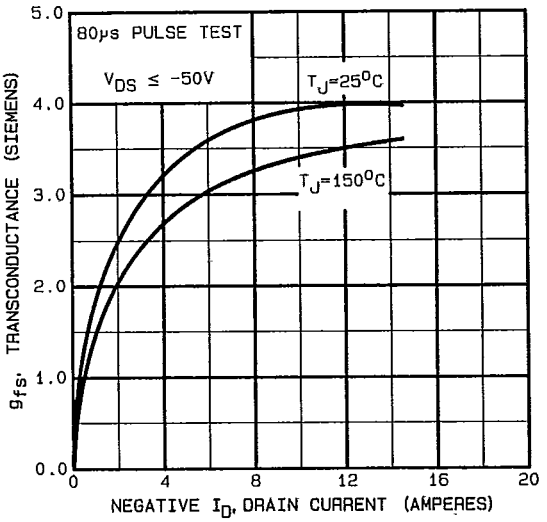

Fig. 6 — Typical Transconductance Vs. Drain Current

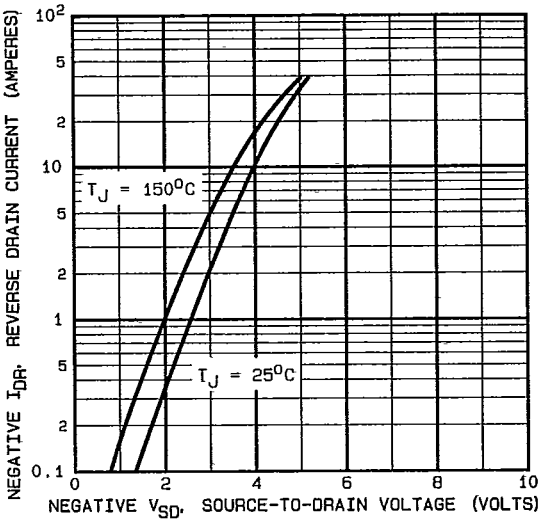

Fig. 7 — Typical Source-Drain Diode Forward Voltage

D-PAK

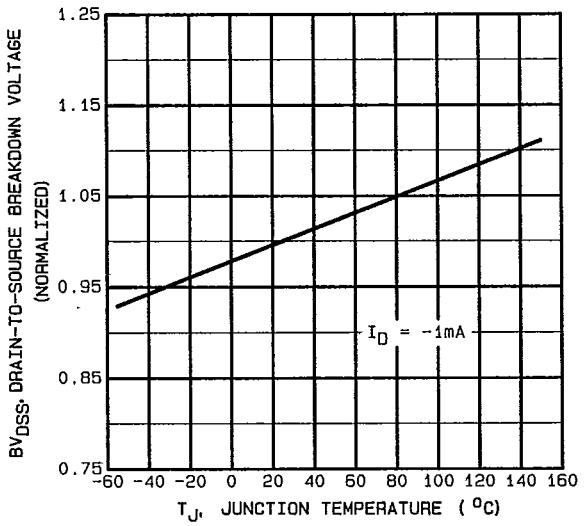

Fig. 8 — Breakdown Voltage Vs. Temperature

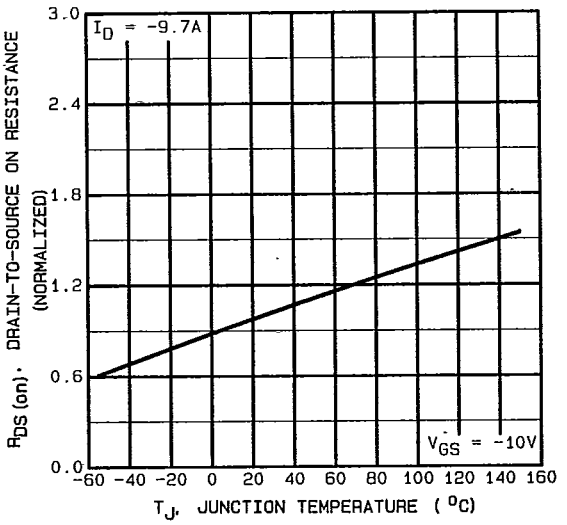

Fig 9 — Normalized On-Resistance Vs. Temperature

www.DataSheet.in

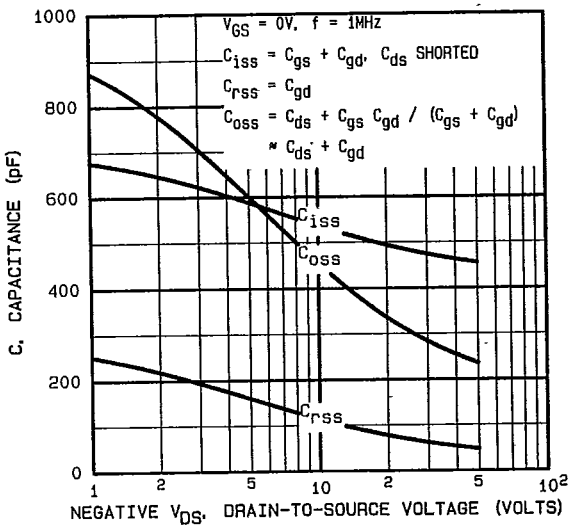

Fig. 10 — Typical Capacitance Vs. Drain-to-Source Voltage

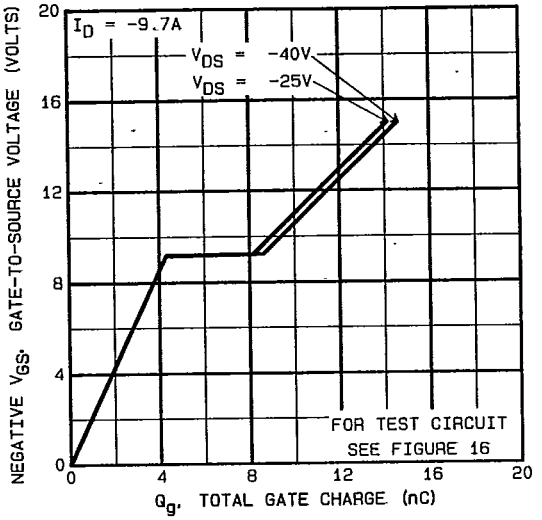

Fig. 11 — Typical Gate Charge Vs. Gate-to-Source Voltage

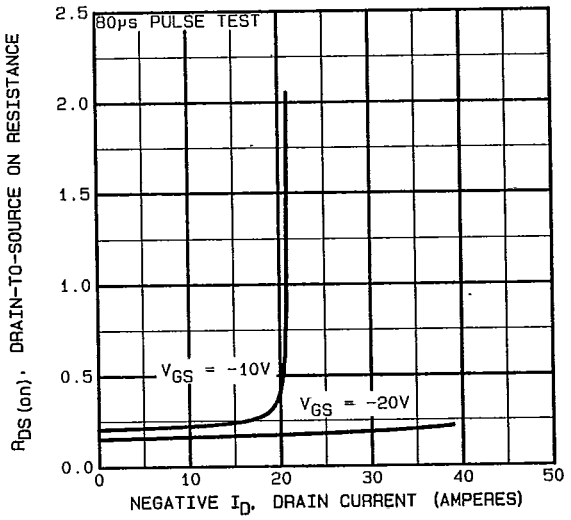

Fig. 12 — Typical On-Resistance Vs. Drain Current

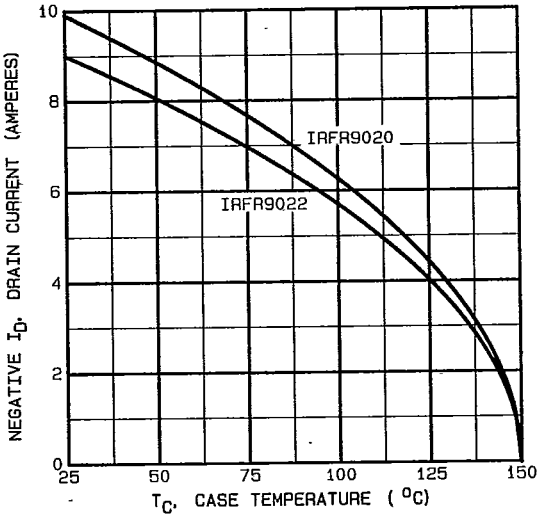

Fig. 13 — Maximum Drain Current Vs. Case Temperature

www.DataSheet.in

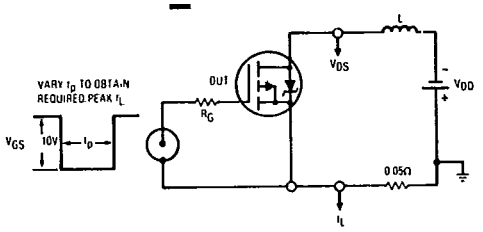

Fig. 14a — Unclamped Inductive Test Circuit

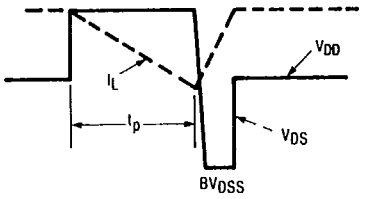

Fig. 14b — Unclamped Inductive Waveforms

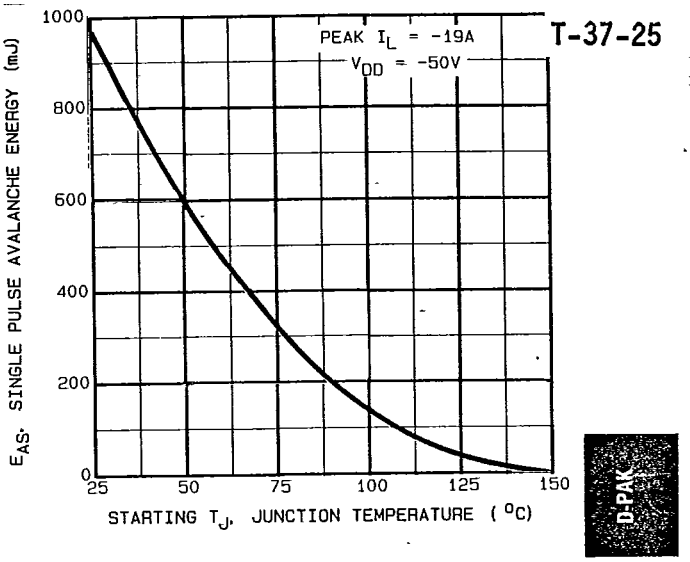

D-PAK

Fig. 14c — Maximum Avalanche Vs. Starting Junction Temperature

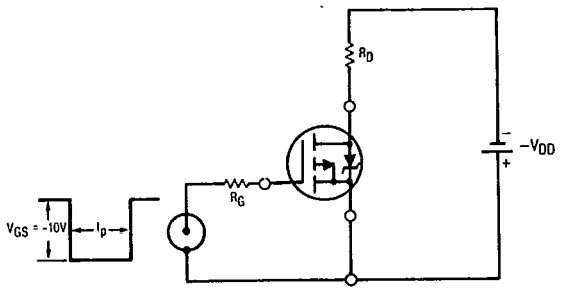

Fig. 15a — Switching Time Test Circuit

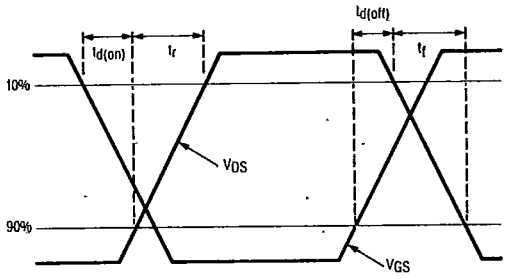

Fig. 15b — Switching Time Waveforms

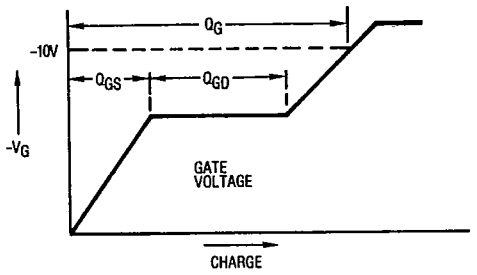

Fig. 16a — Basic Gate Charge Waveform

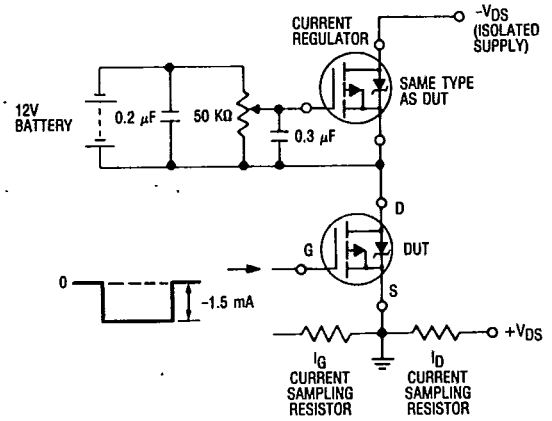

Fig. 16b — Gate Charge Test Circuit

www.DataSheet.in

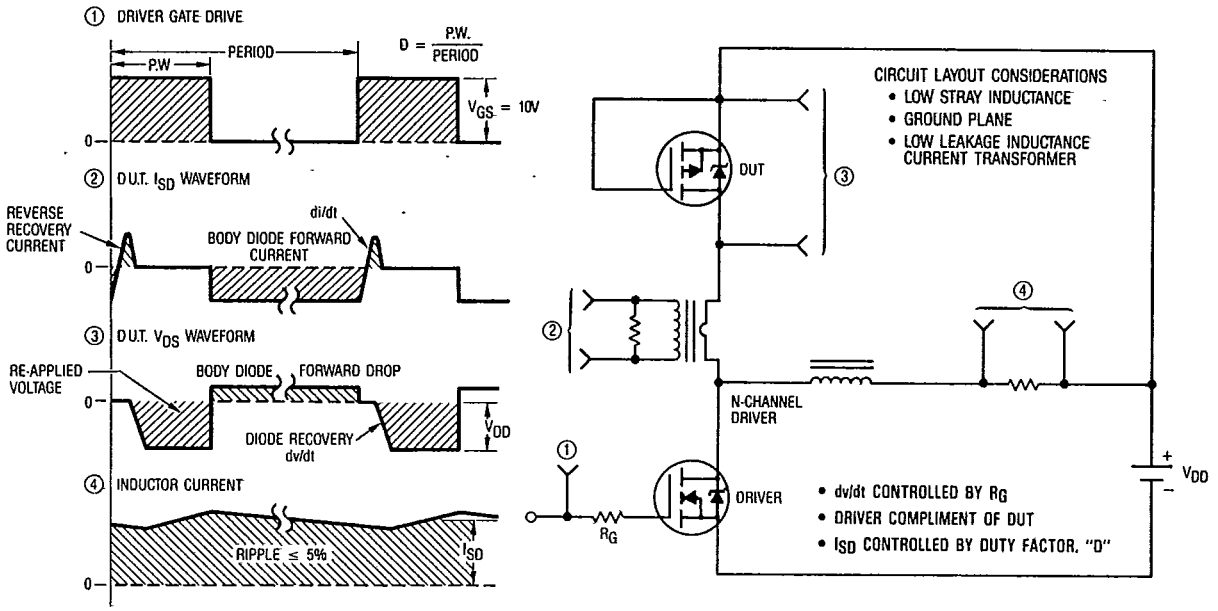

Fig. 17 — Peak Diode Recovery dv/dt Test Circuit

ORDERING INFORMATION

IRFR Series — Tape and reel
when ordering, add TR after the part number and the quantity
(order in multiples of 3,000 pieces).

Example: IRFR9020TR — 15,000 pieces.
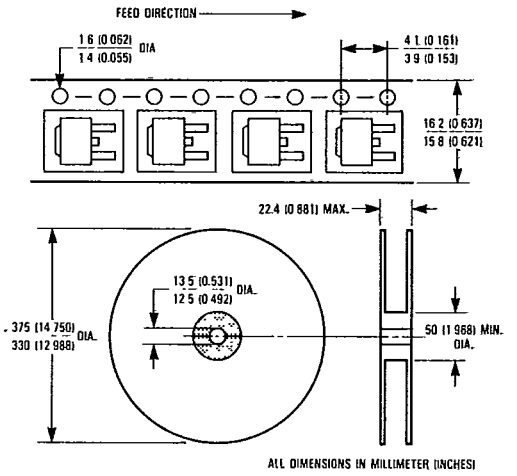
PACKAGING