TAVAKOL ELECTRONIC
توکل الکترونیک
مرجع تخصصی تأمین قطعات الکترونیکی اورجینال

این دیتاشیت توسط توکل الکترونیک تهیه و ارائه شده است.
جهت مشاهده قیمت، موجودی و ثبت سفارش این قطعه به وب‌سایت توکل الکترونیک مراجعه فرمایید.

مشاهده قیمت و خرید
برای خرید و مشاهده سایر محصولات کلیک کنید

isc 1991

INCHANGE SEMICONDUCTOR

isc N-Channel MOSFET Transistor — IRFU4615

- **FEATURES**
- With TO-251(IPAK) packaging
- High speed switching
- Easy to use
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

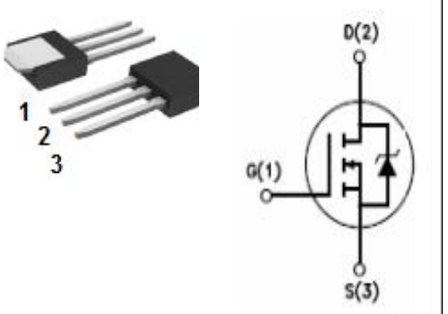

IPAK TO-251 Package

- **APPLICATIONS**
- Power supply
- DC-DC converters
- Motor control
- Switching applications

- **ABSOLUTE MAXIMUM RATINGS(T_a=25℃)**

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	150	V
V_{GSS}	Gate-Source Voltage	±20	V
I_D	Drain Current-Continuous	33	A
I_{DM}	Drain Current-Single Pulsed	140	A
P_D	Total Dissipation	144	W
T_j	Operating Junction Temperature	-55~175	℃
T_{stg}	Storage Temperature	-55~175	℃

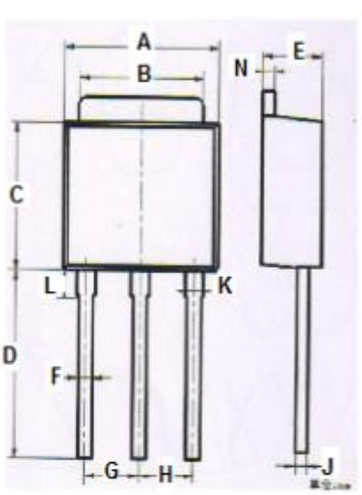

DIM	mm MIN	MAX
A	6.40	6.48
B	5.10	5.50
C	5.80	6.20
D	9.20	9.60
E	2.20	2.40
F	0.50	0.70
G	2.09	2.49
H	2.09	2.49
J	0.40	0.60
K	0.70	0.90
L	1.60	2.00
N	0.40	0.60

- **THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
Rth(ch-c)	Channel-to-case thermal resistance	1.05	℃/W
Rth(ch-a)	Channel-to-ambient thermal resistance	50	℃/W

isc N-Channel MOSFET Transistor IRFU4615

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V; I_D= 0.25mA	150			V
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}; I_D=0.1mA	3.0		5.0	V
$R_{DS(on)}$	Drain-Source On-Resistance	V_{GS}= 10V; I_D=21A		34	42	mΩ
I_{GSS}	Gate-Source Leakage Current	V_{GS}= ±20V;V_{DS}= 0V			±0.1	μA
I_{DSS}	Drain-Source Leakage Current	V_{DS}= 150V; V_{GS}= 0V;Tj=25℃ V_{DS}= 150V; V_{GS}= 0V;Tj=125℃			20 250	μA
V_{SDF}	Diode forward voltage	I_{SD}=21A, V_{GS} =0V			1.3	V

NOTICE：

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.