

این دیتاشیت توسط توکل الکترونیک تهیه و ارائه شده است.  
جهت مشاهده قیمت، موجودی و ثبت سفارش این قطعه به وبسایت توکل الکترونیک مراجعه فرمایید.



مشاهده قیمت و خرید  
برای خرید و مشاهده سایر محصولات کلیک کنید




IXYS

PolarHT™  
Power MOSFET

IXTA 36N30P  
IXTP 36N30P  
IXTQ 36N30P


$V_{DSS} = 300 \text{ V}$   
 $I_{D25} = 36 \text{ A}$   
 $R_{DS(on)} \leq 110 \text{ m}\Omega$

N-Channel Enhancement Mode  
Avalanche Rated




| Symbol     | Test Conditions                                                                                                                          | Maximum Ratings |                  |
|------------|------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------------------|
| $V_{DSS}$  | $T_J = 25^\circ\text{C to } 150^\circ\text{C}$                                                                                           | 300             | V                |
| $V_{DGR}$  | $T_J = 25^\circ\text{C to } 150^\circ\text{C}; R_{GS} = 1 \text{ M}\Omega$                                                               | 300             | V                |
| $V_{GS}$   | Continuous                                                                                                                               | $\pm 30$        | V                |
| $V_{GSM}$  | Transient                                                                                                                                | $\pm 40$        | V                |
| $I_{D25}$  | $T_C = 25^\circ\text{C}$                                                                                                                 | 36              | A                |
| $I_{DM}$   | $T_C = 25^\circ\text{C}$ , pulse width limited by $T_{JM}$                                                                               | 90              | A                |
| $I_{AR}$   | $T_C = 25^\circ\text{C}$                                                                                                                 | 36              | A                |
| $E_{AR}$   | $T_C = 25^\circ\text{C}$                                                                                                                 | 30              | mJ               |
| $E_{AS}$   | $T_C = 25^\circ\text{C}$                                                                                                                 | 1.0             | J                |
| $dv/dt$    | $I_S \leq I_{DM}$ , $di/dt \leq 100 \text{ A}/\mu\text{s}$ , $V_{DD} \leq V_{DSS}$ ,<br>$T_J \leq 150^\circ\text{C}$ , $R_G = 10 \Omega$ | 10              | V/ns             |
| $P_D$      | $T_C = 25^\circ\text{C}$                                                                                                                 | 300             | W                |
| $T_J$      |                                                                                                                                          | -55 ... +150    | $^\circ\text{C}$ |
| $T_{JM}$   |                                                                                                                                          | 150             | $^\circ\text{C}$ |
| $T_{stg}$  |                                                                                                                                          | -55 ... +150    | $^\circ\text{C}$ |
| $T_L$      | 1.6 mm (0.062 in.) from case for 10 s                                                                                                    | 300             | $^\circ\text{C}$ |
| $T_{SOLD}$ | Plastic body for 10 s                                                                                                                    | 260             | $^\circ\text{C}$ |
| $M_d$      | Mounting torque (TO-3P / TO-220)                                                                                                         | 1.13/10         | Nm/lb.in.        |
| Weight     | TO-3P                                                                                                                                    | 5.5             | g                |
|            | TO-220                                                                                                                                   | 4               | g                |
|            | TO-263                                                                                                                                   | 3               | g                |


TO-263 (IXTA)



TO-220 (IXTP)



TO-3P (IXTQ)

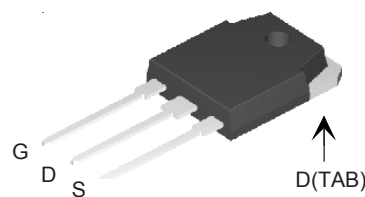

G = Gate  
S = Source

D = Drain  
TAB = Drain

#### Features

- International standard packages
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
- easy to drive and to protect

#### Advantages


- Easy to mount
- Space savings
- High power density

| Symbol       | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified)                                     | Characteristic Values |      |                                      |
|--------------|-----------------------------------------------------------------------------------------------------------------|-----------------------|------|--------------------------------------|
|              |                                                                                                                 | Min.                  | Typ. | Max.                                 |
| $BV_{DSS}$   | $V_{GS} = 0 \text{ V}$ , $I_D = 250 \mu\text{A}$                                                                | 300                   |      | V                                    |
| $V_{GS(th)}$ | $V_{DS} = V_{GS}$ , $I_D = 250 \mu\text{A}$                                                                     | 3.0                   |      | 5.5 V                                |
| $I_{GSS}$    | $V_{GS} = \pm 20 \text{ V}_{DC}$ , $V_{DS} = 0$                                                                 |                       |      | $\pm 100 \text{ nA}$                 |
| $I_{DSS}$    | $V_{DS} = V_{DSS}$<br>$V_{GS} = 0 \text{ V}$<br>$T_J = 125^\circ\text{C}$                                       |                       |      | 1 $\mu\text{A}$<br>200 $\mu\text{A}$ |
| $R_{DS(on)}$ | $V_{GS} = 10 \text{ V}$ , $I_D = 0.5 I_{D25}$<br>Pulse test, $t \leq 300 \mu\text{s}$ , duty cycle $d \leq 2\%$ | 92                    | 110  | $\text{m}\Omega$                     |


| Symbol       | Test Conditions                                                                                    | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |                        |
|--------------|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|------------------------|
|              |                                                                                                    | Min.                                                                              | Typ. | Max.                   |
| $g_{fs}$     | $V_{DS} = 10\text{ V}$ ; $I_D = 0.5 I_{D25}$ , pulse test                                          | 12                                                                                | 22   | S                      |
| $C_{iss}$    | $V_{GS} = 0\text{ V}$ , $V_{DS} = 25\text{ V}$ , $f = 1\text{ MHz}$                                |                                                                                   | 2250 | pF                     |
| $C_{oss}$    |                                                                                                    |                                                                                   | 370  | pF                     |
| $C_{rss}$    |                                                                                                    |                                                                                   | 90   | pF                     |
| $t_{d(on)}$  | $V_{GS} = 10\text{ V}$ , $V_{DS} = 0.5 V_{DSS}$ , $I_D = I_{D25}$<br>$R_G = 10\ \Omega$ (External) |                                                                                   | 24   | ns                     |
| $t_r$        |                                                                                                    |                                                                                   | 30   | ns                     |
| $t_{d(off)}$ |                                                                                                    |                                                                                   | 97   | ns                     |
| $t_f$        |                                                                                                    |                                                                                   | 28   | ns                     |
| $Q_{g(on)}$  | $V_{GS} = 10\text{ V}$ , $V_{DS} = 0.5 V_{DSS}$ , $I_D = 0.5 I_{D25}$                              |                                                                                   | 70   | nC                     |
| $Q_{gs}$     |                                                                                                    |                                                                                   | 17   | nC                     |
| $Q_{gd}$     |                                                                                                    |                                                                                   | 35   | nC                     |
| $R_{thJC}$   |                                                                                                    |                                                                                   |      | $0.42^\circ\text{C/W}$ |
| $R_{thCS}$   | (TO-3P)                                                                                            | 0.21                                                                              |      | $^\circ\text{C/W}$     |
|              | (TO-220)                                                                                           | 0.25                                                                              |      | $^\circ\text{C/W}$     |

| Source-Drain Diode |                                                                                                          | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |               |
|--------------------|----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|---------------|
| Symbol             | Test Conditions                                                                                          | Min.                                                                              | Typ. | Max.          |
| $I_S$              | $V_{GS} = 0\text{ V}$                                                                                    |                                                                                   |      | 36 A          |
| $I_{SM}$           | Repetitive                                                                                               |                                                                                   |      | 90 A          |
| $V_{SD}$           | $I_F = I_S$ , $V_{GS} = 0\text{ V}$ ,<br>Pulse test, $t \leq 300\ \mu\text{s}$ , duty cycle $d \leq 2\%$ |                                                                                   |      | 1.5 V         |
| $t_{rr}$           | $I_F = 25\text{ A}$ , $-di/dt = 100\text{ A}/\mu\text{s}$                                                |                                                                                   | 250  | ns            |
| $Q_{RM}$           | $V_R = 100\text{ V}$ , $V_{GS} = 0\text{ V}$                                                             |                                                                                   | 2.0  | $\mu\text{C}$ |

### TO-263 (IXTA) Outline

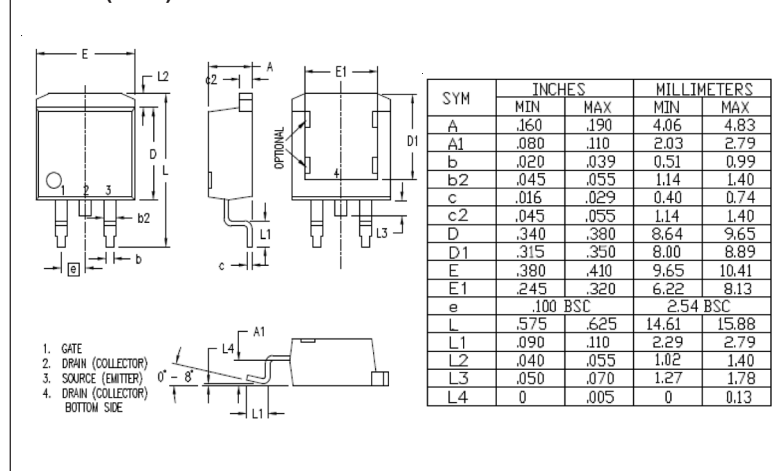


### TO-3P (IXTQ) Outline

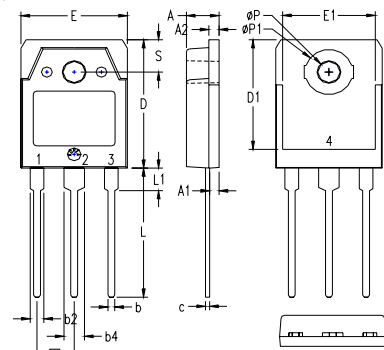

- 1 - GATE  
2 - DRAIN (COLLECTOR)  
3 - SOURCE (EMITTER)  
4 - DRAIN (COLLECTOR)

| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .185     | .193 | 4.70        | 4.90  |
| A1  | .051     | .059 | 1.30        | 1.50  |
| A2  | .057     | .065 | 1.45        | 1.65  |
| b   | .035     | .045 | 0.90        | 1.15  |
| b2  | .075     | .087 | 1.90        | 2.20  |
| b4  | .114     | .126 | 2.90        | 3.20  |
| c   | .022     | .031 | 0.55        | 0.80  |
| D   | .780     | .799 | 19.80       | 20.30 |
| D1  | .665     | .677 | 16.90       | 17.20 |
| E   | .610     | .622 | 15.50       | 15.80 |
| E1  | .531     | .539 | 13.50       | 13.70 |
| e   | .215 BSC |      | 5.45 BSC    |       |
| L   | .779     | .795 | 19.80       | 20.20 |
| L1  | .134     | .142 | 3.40        | 3.60  |
| ØP  | .126     | .134 | 3.20        | 3.40  |
| ØP1 | .272     | .280 | 6.90        | 7.10  |
| S   | .193     | .201 | 4.90        | 5.10  |

### TO-220 (IXTP) Outline



- Pins: 1 - Gate 2 - Drain

| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .170     | .190 | 4.32        | 4.83  |
| b   | .025     | .040 | 0.64        | 1.02  |
| b1  | .045     | .065 | 1.15        | 1.65  |
| c   | .014     | .022 | 0.35        | 0.56  |
| D   | .580     | .630 | 14.73       | 16.00 |
| E   | .390     | .420 | 9.91        | 10.66 |
| e   | .100 BSC |      | 2.54 BSC    |       |
| F   | .045     | .055 | 1.14        | 1.40  |
| H1  | .230     | .270 | 5.85        | 6.85  |
| J1  | .090     | .110 | 2.29        | 2.79  |
| k   | 0        | .015 | 0           | 0.38  |
| L   | .500     | .550 | 12.70       | 13.97 |
| L1  | .110     | .230 | 2.79        | 5.84  |
| ØP  | .139     | .161 | 3.53        | 4.08  |
| Q   | .100     | .125 | 2.54        | 3.18  |

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585  
one or more of the following U.S. patents: 4,850,072 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2 6,759,692  
4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6,771,478 B2

**Fig. 1. Output Characteristics  
@ 25°C**

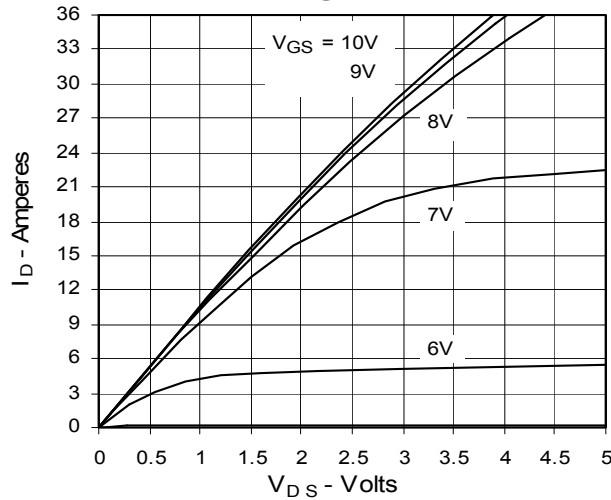


**Fig. 2. Extended Output Characteristics  
@ 25°C**

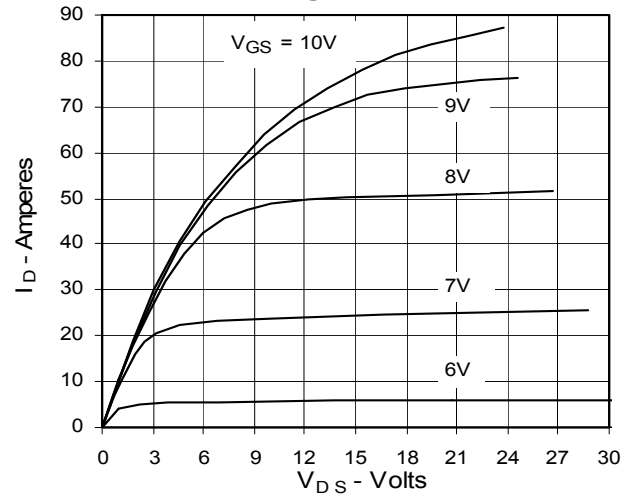


**Fig. 3. Output Characteristics  
@ 125°C**

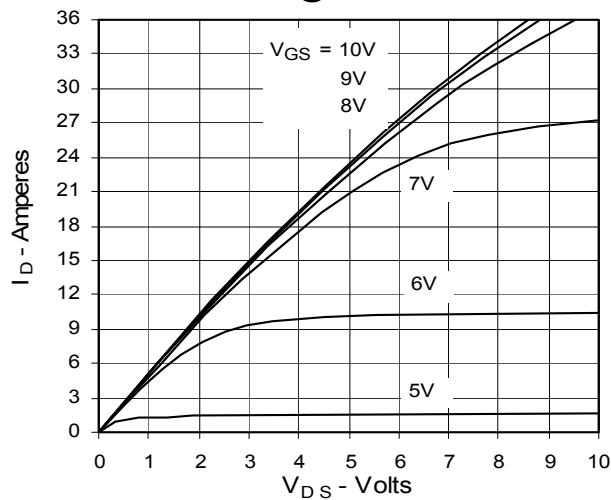


**Fig. 4.  $R_{DS(on)}$  Normalized to 0.5  $I_{D25}$   
Value vs. Junction Temperature**

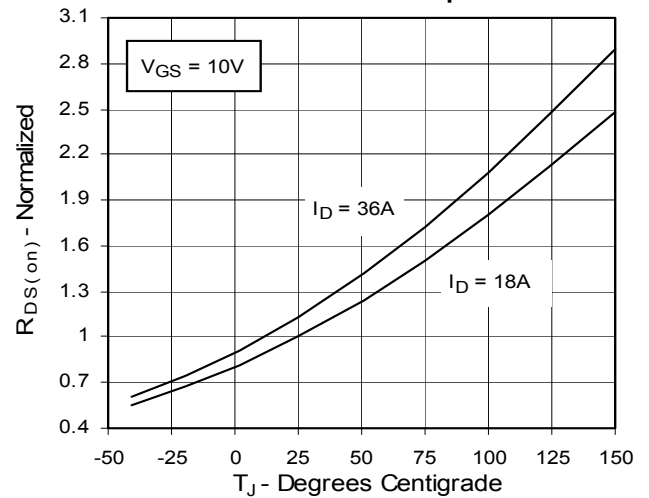


**Fig. 5.  $R_{DS(on)}$  Normalized to  
0.5  $I_{D25}$  Value vs.  $I_D$**

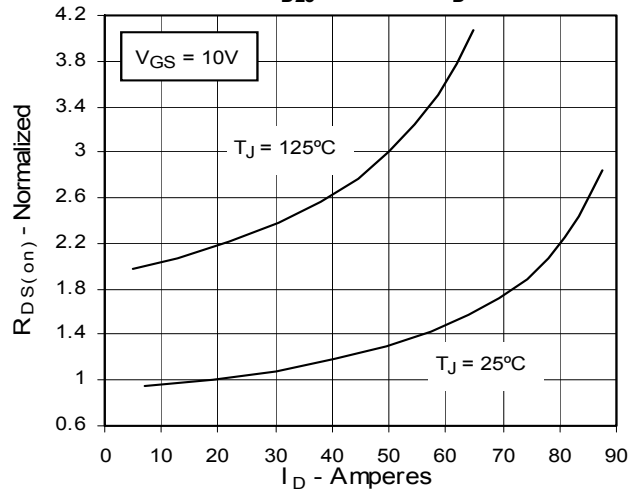


**Fig. 6. Drain Current vs. Case  
Temperature**

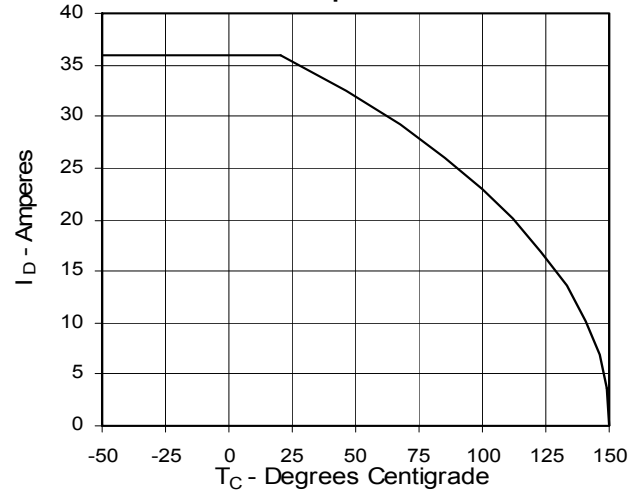


**Fig. 7. Input Admittance**

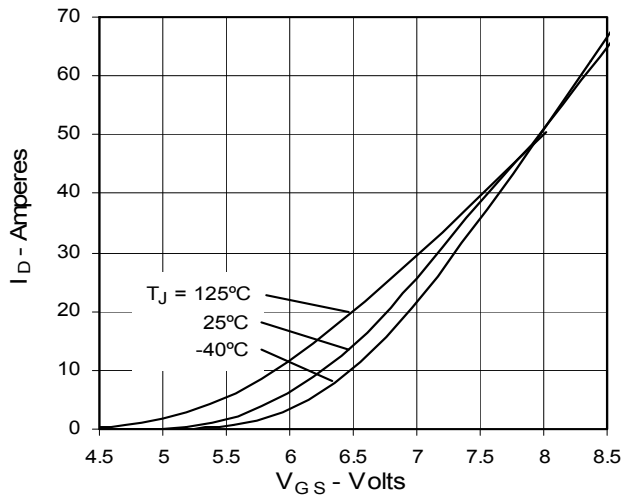


**Fig. 8. Transconductance**

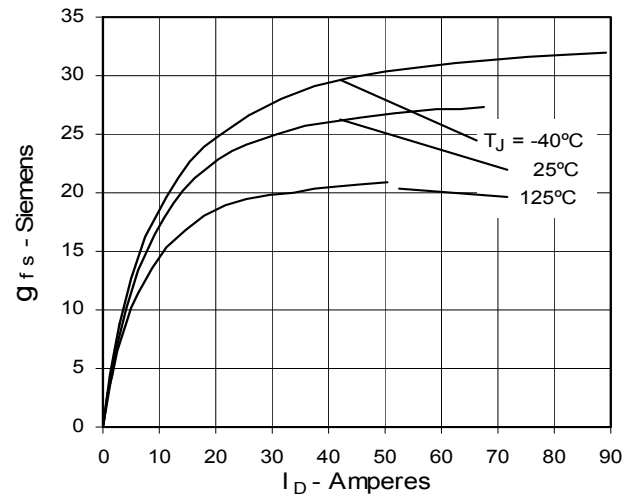


**Fig. 9. Source Current vs. Source-To-Drain Voltage**

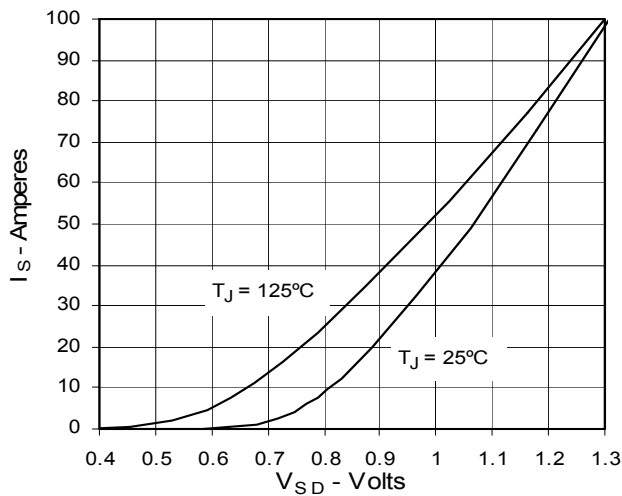


**Fig. 10. Gate Charge**

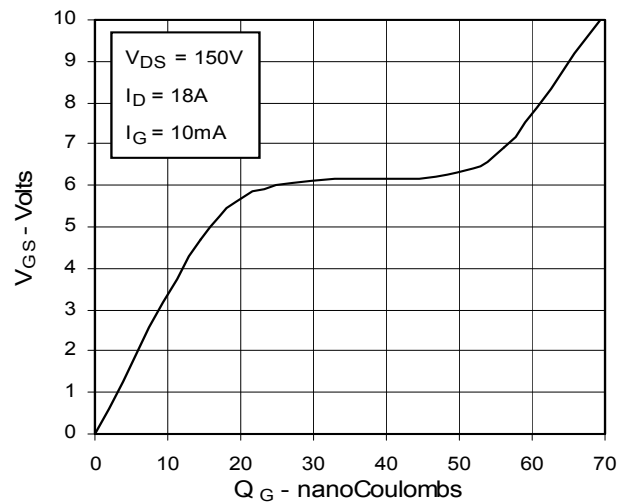


**Fig. 11. Capacitance**

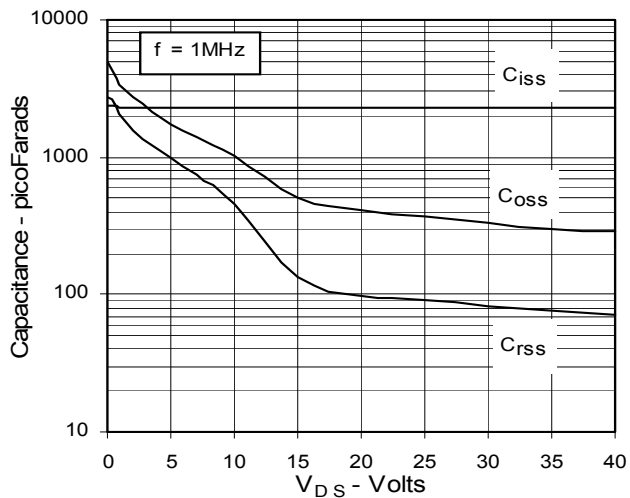


**Fig. 12. Forward-Bias Safe Operating Area**


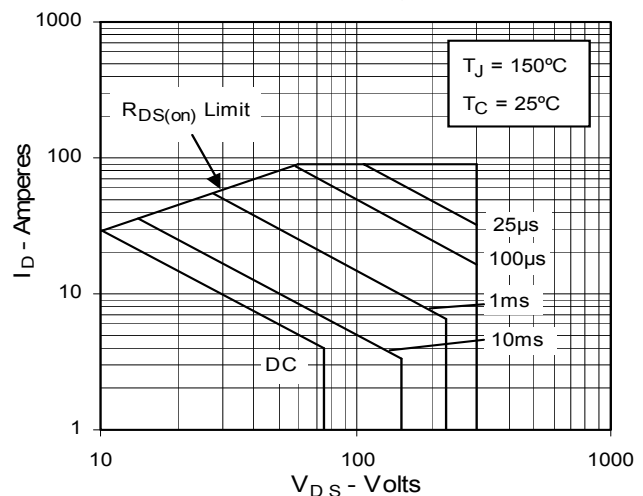


Fig. 13. Maximum Transient Thermal Resistance



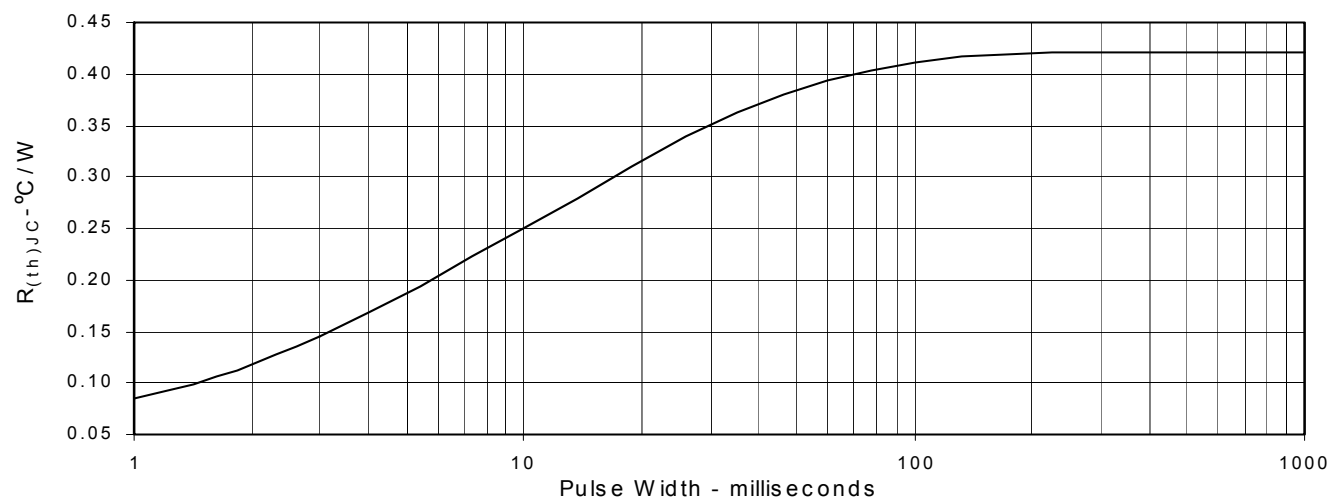

---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).