TAVAKOL ELECTRONIC
توکل الکترونیک
مرجع تخصصی تأمین قطعات الکترونیکی اورجینال
این دیتاشیت توسط توکل الکترونیک تهیه و ارائه شده است.
جهت مشاهده قیمت، موجودی و ثبت سفارش این قطعه به وب‌سایت توکل الکترونیک مراجعه فرمایید.
مشاهده قیمت و خرید
برای خرید و مشاهده سایر محصولات کلیک کنید

SKM 200 GARL 066 T



SEMITRANS® 5

Trench IGBT Modules

SKM 200 GARL 066 T

Features


- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- Integrated NTC temperature sensor

Typical Applications*

- UPS
- INVERTER

Remarks

- Case temperature limited to T_c =125°C max, recommended T_{op} = -40..+150°C
- Recommended T_{op} = -40..+150°C
- T_{vj} is intended as absolute maximum rating
- Fig.2 is referred to IGBT current capability




GARL-T

Absolute Maximum Ratings			T_{case} = 25°C, unless otherwise specified	
Symbol	**Conditions**		**Values**	**Units**
IGBT				
V_{CES}	T_j = 25 °C		600	V
I_C	T_j = 175 °C	T_c = 25 °C	280	A
		T_c = 80 °C	210	A
I_{CRM}	I_{CRM}=2xI_{Cnom}		400	A
V_{GES}			± 20	V
t_{psc}	V_{CC} = 360 V; $V_{GE} \leq$ 15 V; V_{CES} < 600 V	T_j = 150 °C	6	µs
Inverse Diode				
I_F	T_j = 175 °C	T_c = 25 °C	27	A
		T_c = 80 °C	20	A
I_{FRM}	I_{FRM}=2xI_{Fnom}		40	A
I_{FSM}	t_p = 10 ms; half sine wave	T_j = 150 °C	95	A
Freewheeling Diode				
I_F	T_j = 175 °C	T_c = 25 °C	270	A
		T_c = 80 °C	200	A
I_{FRM}	I_{FRM}=2xI_{Fnom}		400	A
I_{FSM}	t_p = 10 ms; half sine wave	T_j = 150 °C	1620	A
Module				
$I_{t(RMS)}$			500	A
T_{vj}			- 40 ... + 175	°C
T_{stg}			- 40 ... + 125	°C
V_{isol}	AC, 1 min.		2500	V

Characteristics			T_{case} = 25°C, unless otherwise specified			
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Units**
IGBT						
$V_{GE(th)}$	V_{GE} = V_{CE}, I_C = 3,2 mA		5	5,8	6,5	V
I_{CES}	V_{GE} = 0 V, V_{CE} = V_{CES}	T_j = 25 °C			0,5	mA
I_{GES}	V_{CE} = 0 V, V_{GE} = 20 V	T_j = 25 °C			1200	nA
V_{CE0}		T_j = 25 °C		0,9	1	V
		T_j = 150 °C		0,7	0,8	V
r_{CE}	V_{GE} = 15 V	T_j = 25°C		2,7	4,5	mΩ
		T_j = 150°C		5	6,5	mΩ
$V_{CE(sat)}$	I_{Cnom} = 200 A, V_{GE} = 15 V	T_j = 25°C$_{chiplev.}$		1,45	1,9	V
		T_j = 150°C$_{chiplev.}$		1,7	2,1	V
C_{ies}	V_{CE} = 25, V_{GE} = 0 V	f = 1 MHz		12,3		nF
C_{oes}				0,76		nF
C_{res}				0,36		nF
Q_G	V_{GE} = -8V...+15V			2254		nC
R_{Gint}	T_j = 25 °C			1		Ω
$t_{d(on)}$	R_{Gon} = 1 Ω	V_{CC} = 300V		93		ns
t_r	di/dt = 1700 A/µs	I_C= 200A		113		ns
E_{on}		T_j = 150 °C		2,24		mJ
$t_{d(off)}$	R_{Goff} = 1 Ω	V_{GE} = -8V/+15V		317		ns
t_f	di/dt = 2000 A/µs			102		ns
E_{off}				7,89		mJ
$R_{th(j-c)}$	per IGBT			0,21		K/W

 © by SEMIKRON

SKM 200 GARL 066 T

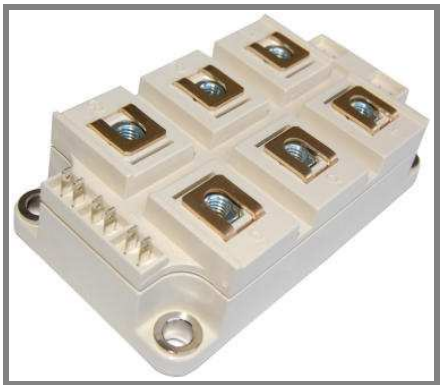

SEMITRANS® 5

Trench IGBT Modules

SKM 200 GARL 066 T

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- Integrated NTC temperature sensor

Typical Applications*

- UPS
- INVERTER


Remarks

- Case temperature limited to T_c =125°C max, recommended T_{op} = -40..+150°C
- Recommended T_{op} = -40..+150°C
- T_{vj} is intended as absolute maximum rating
- Fig.2 is referred to IGBT current capability

Characteristics						
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Units**
Inverse Diode						
$V_F = V_{EC}$	I_{Fnom} = 20 A; V_{GE} = 0 V	T_j = 25 °$C_{chiplev.}$		1,45	1,7	V
		T_j = 150 °$C_{chiplev.}$		1,45	1,7	V
V_{F0}		T_j = 25 °C		1	1,1	V
		T_j = 150 °C		0,9	1	V
r_F		T_j = 25 °C		22,5	30	mΩ
		T_j = 150 °C		27,5	35	mΩ
I_{RRM}	I_F = 20 A	T_j = 150 °C				A
Q_{rr}						µC
E_{rr}	V_{GE} = -8 V; V_{CC} = 300 V					mJ
$R_{th(j-c)D}$	per diode			3		K/W
Free-wheeling diode						
$V_F = V_{EC}$	I_{Fnom} = 200 A; V_{GE} = 0 V	T_j = 25 °$C_{chiplev.}$		1,4	1,6	V
		T_j = 150 °$C_{chiplev.}$		1,3	1,45	V
V_{F0}		T_j = 25 °C		0,95	1	V
		T_j = 150 °C		0,85	0,9	V
r_F		T_j = 25 °C		2,2	3	V
		T_j = 150 °C		2,1	2,7	V
I_{RRM}	I_F = 200 A	T_j = 150 °C		175,8		A
Q_{rr}	di/dt = 2000 A/µs			12		µC
E_{rr}	V_{GE} = -15/+15 V; V_{CC} = 300 V			4		mJ
$R_{th(j-c)FD}$	per diode			0,39		K/W
$R_{th(c-s)}$	per module				0,038	K/W
M_s	to heat sink M6		3		5	Nm
M_t	to terminals M6		2,5		5	Nm
w					310	g
Temperature sensor						
R_{100}	T_s=100°C (R_{25}=5kΩ)			493±5%		Ω
						K

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.



GARL-T

 © by SEMIKRON

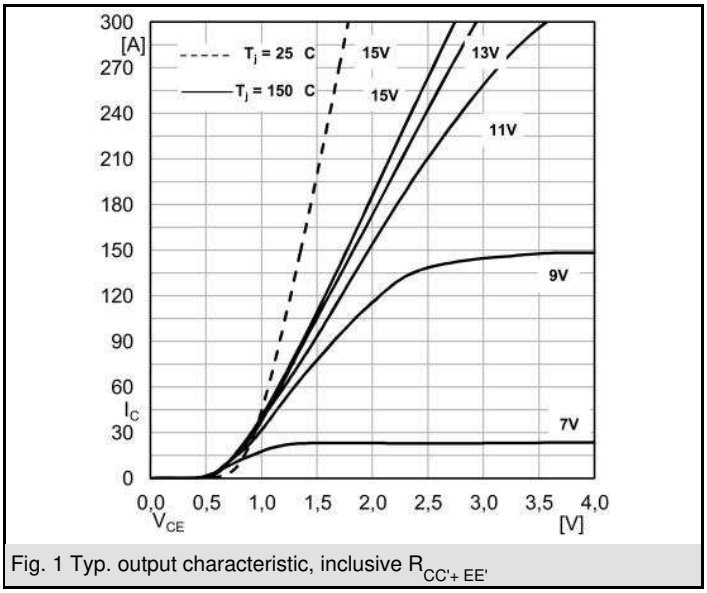


Fig. 1 Typ. output characteristic, inclusive $R_{CC'+EE'}$

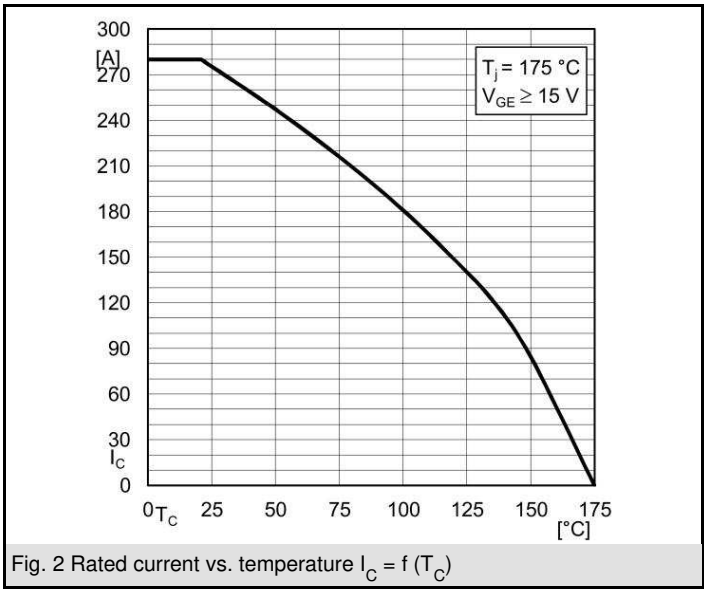


Fig. 2 Rated current vs. temperature $I_C = f(T_C)$

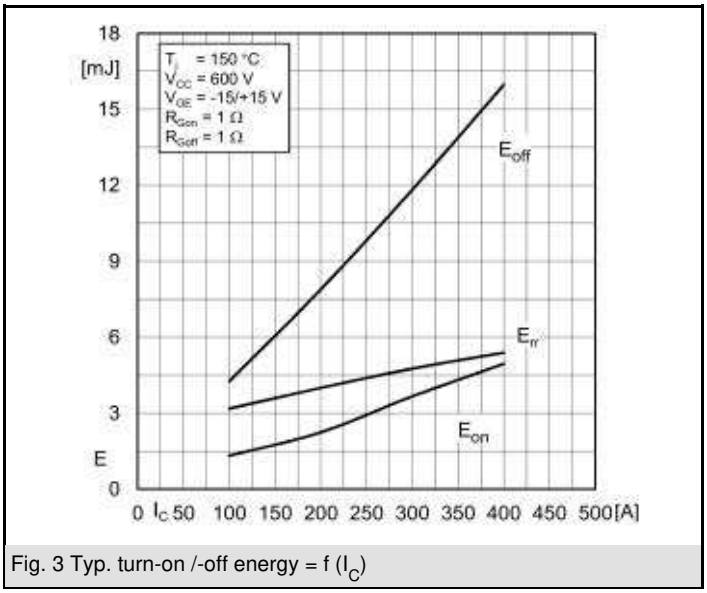


Fig. 3 Typ. turn-on /-off energy = f (I_C)

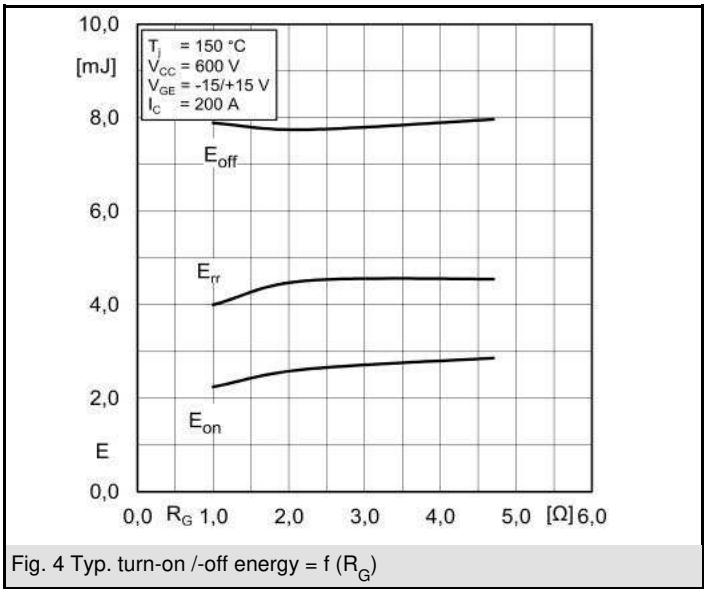


Fig. 4 Typ. turn-on /-off energy = f (R_G)

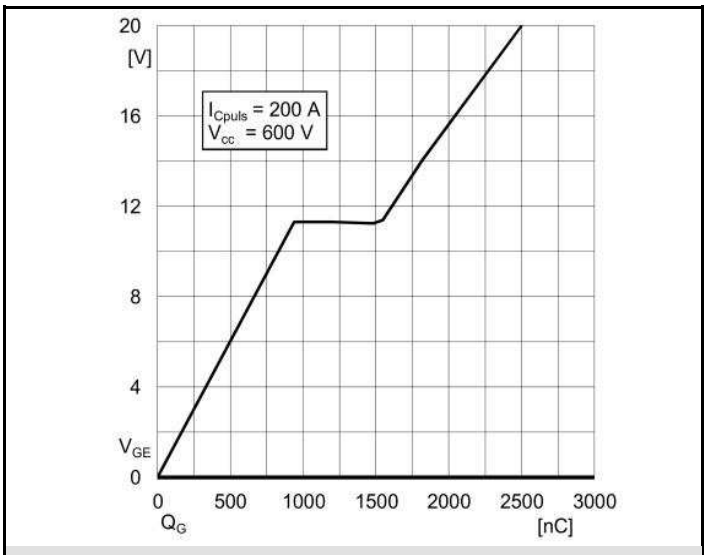


Fig. 6 Typ. gate charge characteristic

 © by SEMIKRON

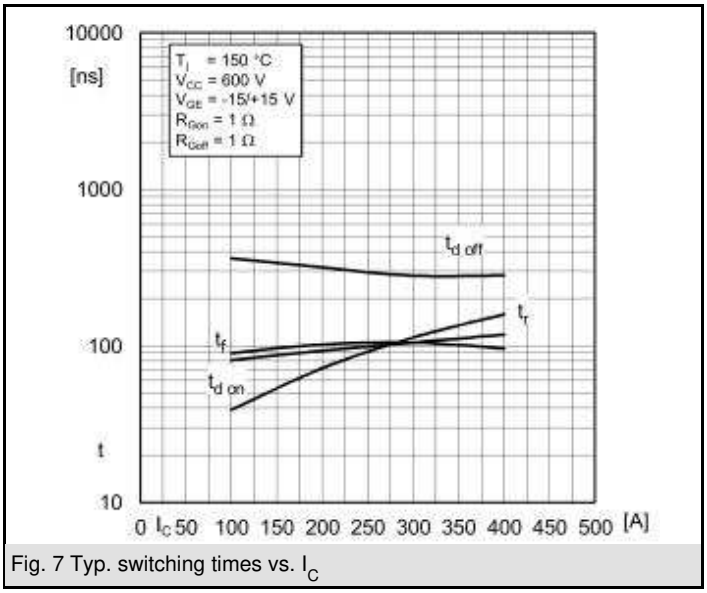


Fig. 7 Typ. switching times vs. I_C

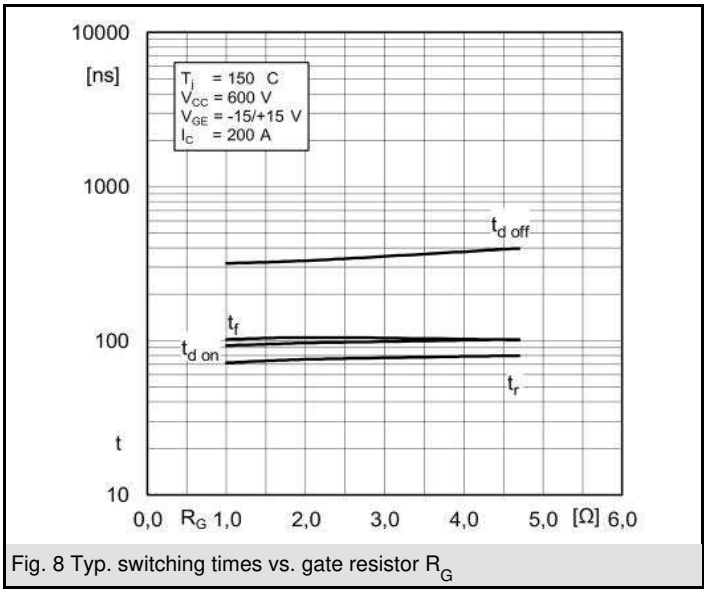


Fig. 8 Typ. switching times vs. gate resistor R_G


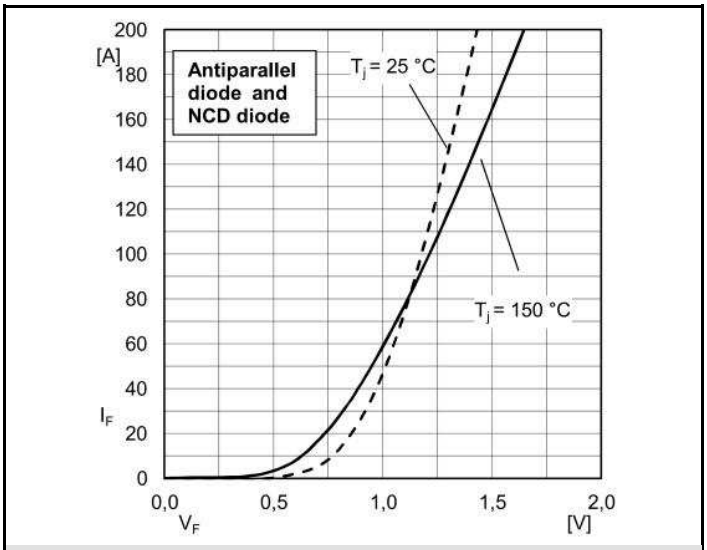


Fig. 10 CAL diode forward characteristic


 © by SEMIKRON

SKM 200 GARL 066 T

UL recognized file no. E 63 532

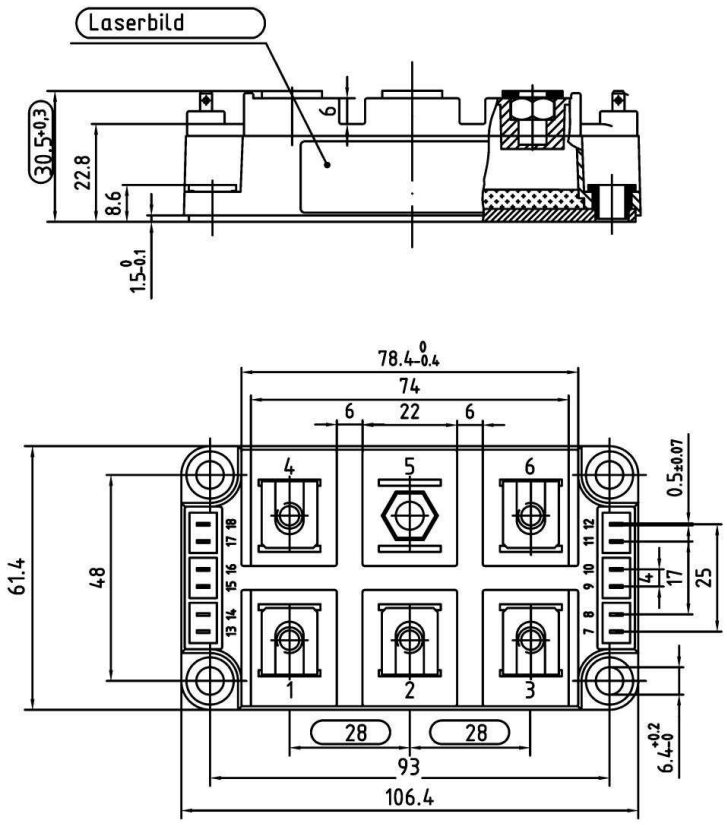

Case D61

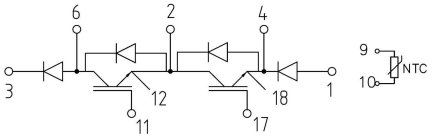

GARL-T Case D61

 © by SEMIKRON